
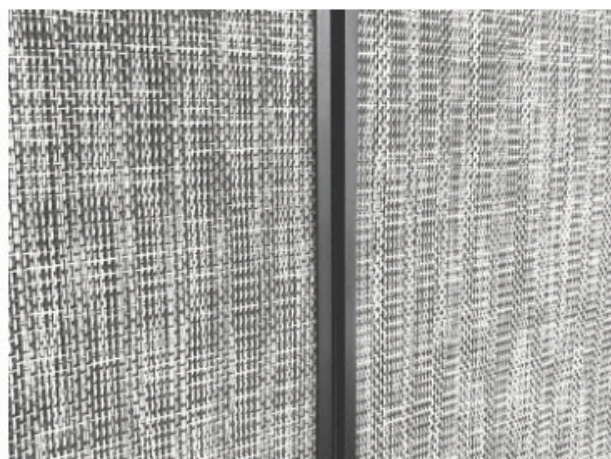


texlyweave®

we challenge the norms of weaving

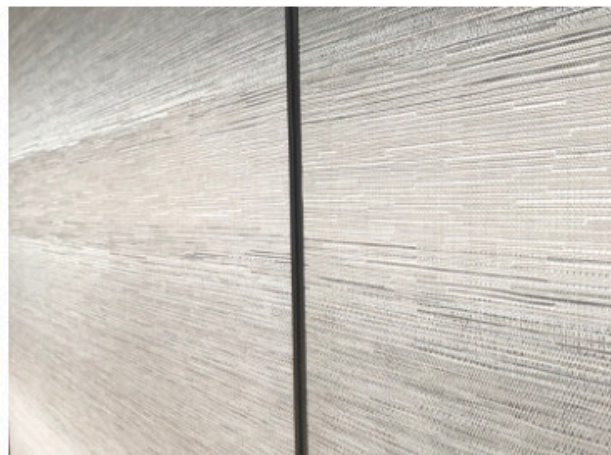

Material 材料: 25% PET 75% PVC Woven vinyl/乙烯基編織
Backing 底背: 5mm 1900gsm GMT
Thickness 厚度: 6mm; Weight 克重: 2850gsm
Size 规格: 680/1220 x 2440/2750cm
Traffic 强度: Heavy-duty application
Maintenance 维护: W-clean with water-based cleaner 水基洗滌
Flammability 防火: GB8624/EN13501-1: B2 (D-S2,D0)
Lightfastness 光照色牢度: ISO 4892-3: 1000h G4-5
Acoustics 吸音: EN11654: Class D
Colorfastness Rubbing 耐磨色牢度: ISO 105-X12: 2001/
Dry干磨: 4-5
Wet湿磨: 4-5
Abrasion Resistance 耐磨: ISO 12947-2: >20000
Water& Stain Repellent

Note 注意: This product is a simulation of natural materials, variations in Texture and Colour are inherent characteristics.
该产品模拟天然材质的纹理和颜色, 其呈现的差异是产品之内在特性。

Flexible Wallpanel **柔性装饰墙板**

更多资讯, 謹請垂詢!

For more information, please contact us at
[info@dragonshine.net!](mailto:info@dragonshine.net)



EN 14041: 2004

EN 14041: 2004 + AC: 2006

FLIPHTML5



@texlyweave

