

texlyweave®

THE TEXLYWEAVE FLOORING




Long lasting colours, unique feel and modern look.




Java 1022




Terrocotta 0915



Giada 0934




Smeraldo 0933




Teak 1015



Stretch 1024




Amber 0931




Calce 0961



Pewter 1031



Alluminio 0913



Sauvignon 0935




Pebble 1032


Good sound absorption with 4mm thickness; (ENISO 140-8) Durable, long lasting on color and easy to maintain; (EN1307, EN1470, EN423, EN438, class 33 EN685)

Energy-conservation and environmental protection. The total production processing uses low temperatures and nearly zero water. All excess material created during production can be recycled. With textyweave® at home, the heating and air conditioner will work less, textyweave® flooring will keep your home at the desired temperature for a longer time. Woven vinyl products were always designed for outdoor applications. The product is solution dyed, meaning that the color is created in the solution before the fibres are extruded. Thus the color is solid throughout all the fibres and yarns created gives it unsurpassed color life against fading. (EN1307, EN1470)


Strong, durable, soft and comfortable.



Triange 0918 




Harvest 0914 




Patina 0922 




Notte 0912 




Willow 0916 




Ochre 0926 

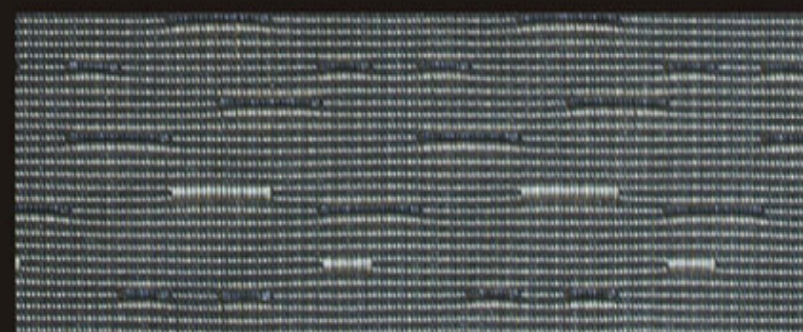


Black 0925 

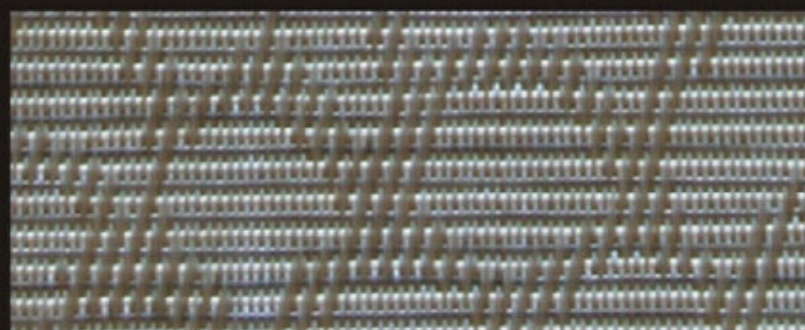

Conch 0929 




Pantano Brown 1107 



Pantano Silver 1108 


Woven vinyl textiles are strong, durable and flame resistant. They are easy to clean; (EN423, EN438) have a comfortable feel, and are available in a wide range of colors. This has made their use in flooring a natural development to take advantage of these favourable characteristics. The durability of the product makes it a good choice for high traffic hotel, apartment, commercial and, of course residential applications. (Tested for Class 33 EN685) The material is also versatile and can be used without back, where appropriate or backed for strength and anti-slip characteristics, or treated for special applications. The backings can be used to create fabrics that are more durable, flame resistant, (EN14041) and with different breathability.

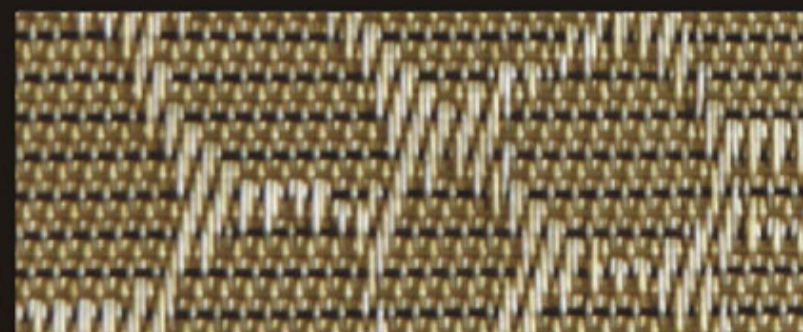


Pantano Gold 1106 

NOTE: Slight color variations between dye lots may occur. If exact color is required, please ask for a cutting from current stock.


Strong, durable, soft and comfortable.




Triange 0918




Harvest 0914




Patina 0922




Notte 0912




Willow 0916




Ochre 0926

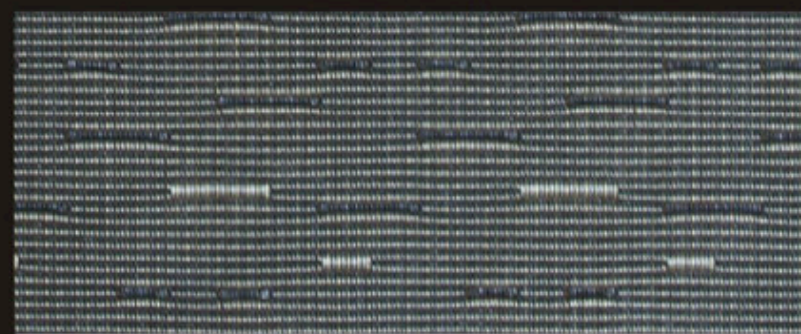


Black 0925

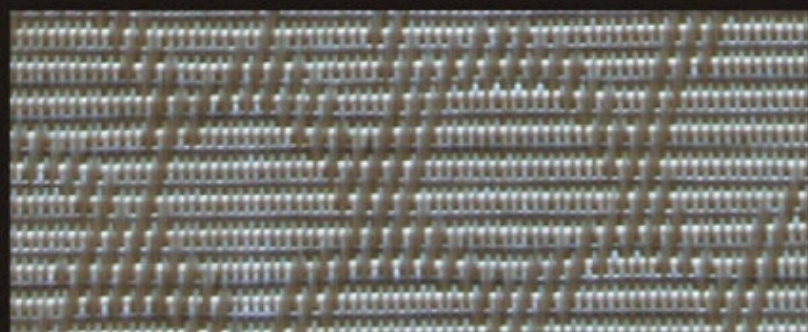

Conch 0929




Pantano Brown 1107



Pantano Silver 1108

Woven vinyl textiles are strong, durable and flame resistant. They are easy to clean; (EN423,EN438) have a comfortable feel, and are available in a wide range of colors. This has made their use in flooring a natural development to take advantage of these favourable characteristics. The durability of the product makes it a good choice for high traffic hotel, apartment, commercial and, of course residential applications. (Tested for Class 33 EN685) The material is also versatile and can be used without back, where appropriate or backed for strength and anti-slip characteristics, or treated for special applications. The backings can be used to create fabrics that are more durable, flame resistant, (EN14041) and with different breathability.

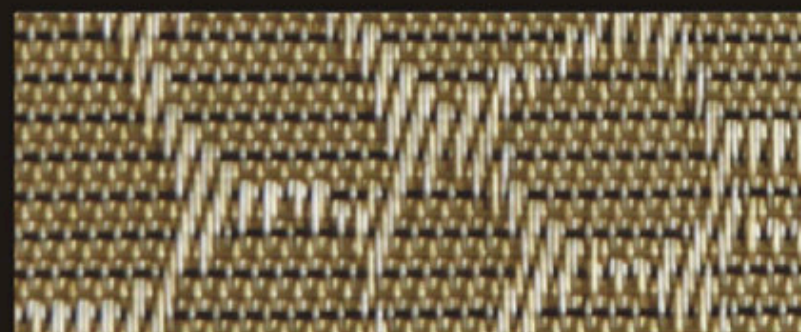

Pantano Gold 1106

NOTE: Slight color variations between dye lots may occur. If exact color is required, please ask for a cutting from current stock.



condo




hall



gymnasia



shop



office

Technical informations:

construction: woven vinyl flooring, product standard EN 15114

Classification		EN 685	33 heavy commercial applications
Color fastness to light		EN ISO EN105-B02	>6
Fire classification		EN ISO 13501	Cfl-s1
Body voltage		ISO 6356	<2kv
Castor chair suitability		EN 985	continuous use
Slip resistance		EN 14041 Technical class DS	>0.3

Dimensional stability		ISO 2551	<0.33
Impact noise reduction		EN ISO 140-8	$\Delta L_w=22$
Resistance to stains		EN 423	Rating 0 No effect (highest grade)
Thickness		EN 428	4.0mm±0.01
Roll length		EN 426	15-25m
Roll width		EN 426	2m
Roll weight		EN 430	1.8kg-2.8kg

NOTE: This information is offered for your general guidance only. It's accurate to the best of our knowledge and is not intended to relieve the user from its responsibility to investigate and understand other pertinent sources of information and to comply with all laws and procedures applicable to the safe handling and use of this material. Final determination of the suitability of any product for an application rests with the user.


Textyweave® patterns are designed to simulate a hand worked natural material. Subtle variations in colour, and shading should be anticipated, as these variations are part of the manufacturing process, and add to the richness and beauty of the product.

If exact colour is required, please ask for a cutting from the same stock to avoid too much difference.

IMPORTANT: Textyweave® patterns are designed to simulate a hand worked natural material. Subtle variations in colour, and shading should be anticipated, as these variations are part of the manufacturing process, and add to the richness and beauty of the product.

Project and technical support

Regarding to installation and care, contact with local agents or directly to us on www.textyweave.com



texlyweave®
THE TEXLYWEAVE FLOORING

