


2016-2017


texlyweave®
texlymat®

THE TEXLYWEAVE FLOORING

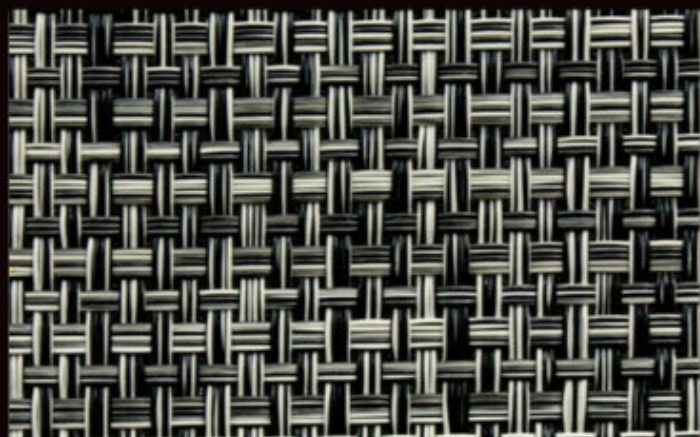


Rock

0902

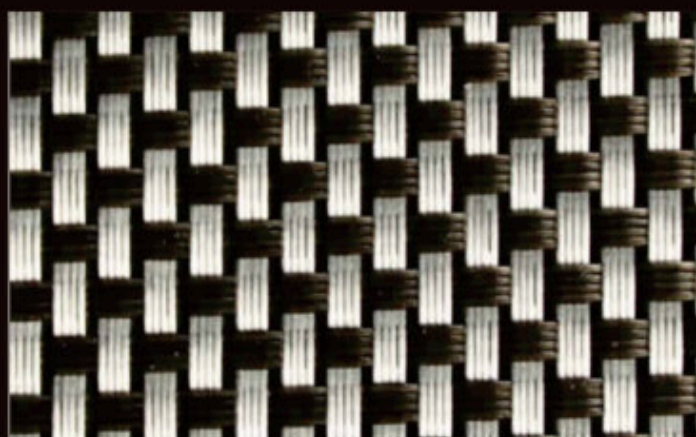


Alluminio

0913

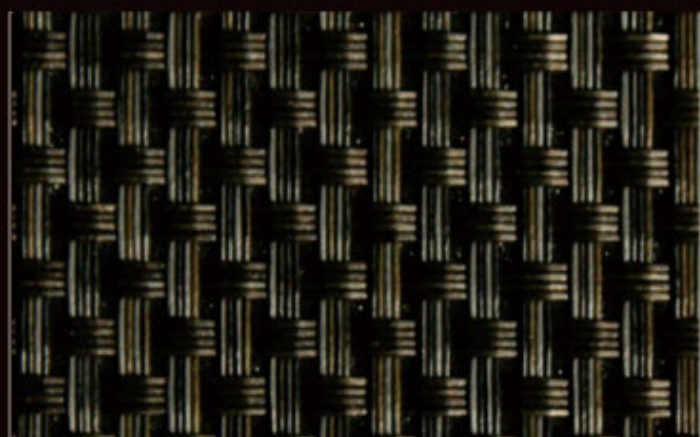


Notte

0912

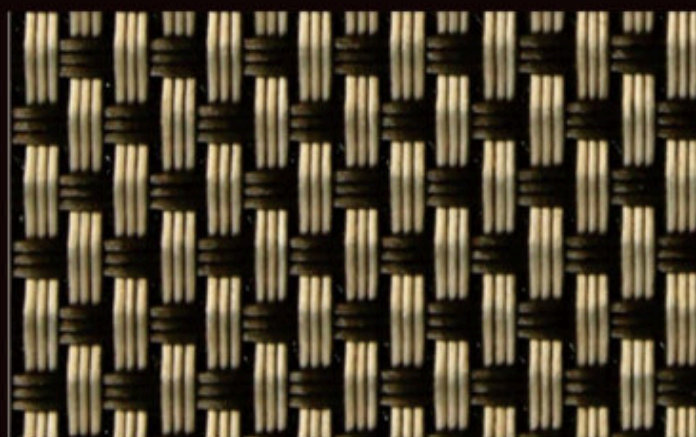


Willow

0916

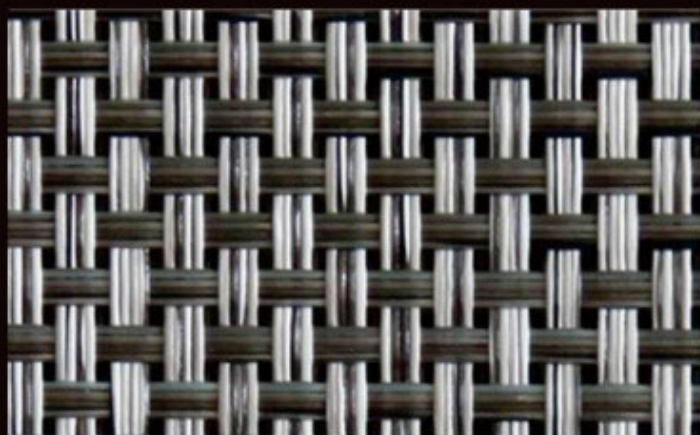


Calce

0961

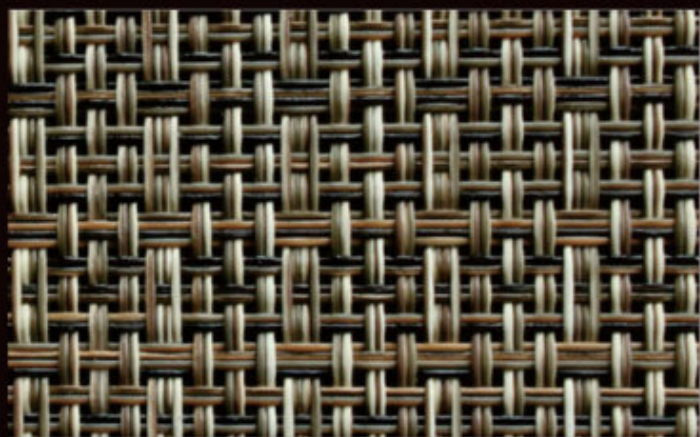

Harvest


0914

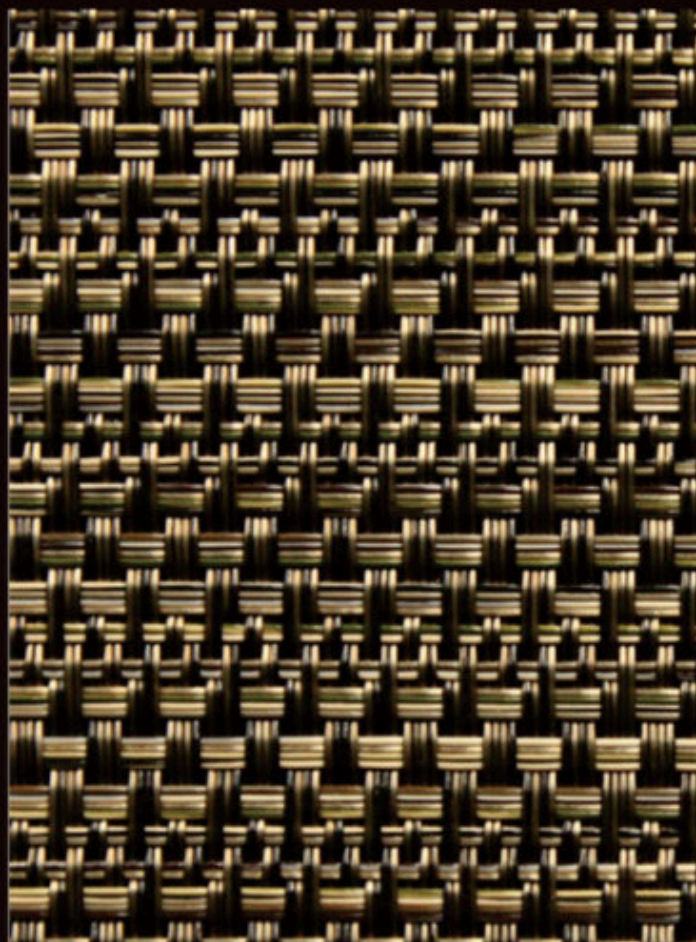

Patina


0922



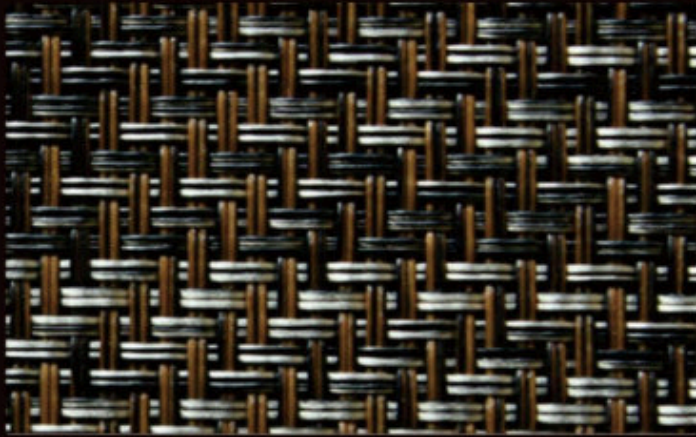


Twill

0930 

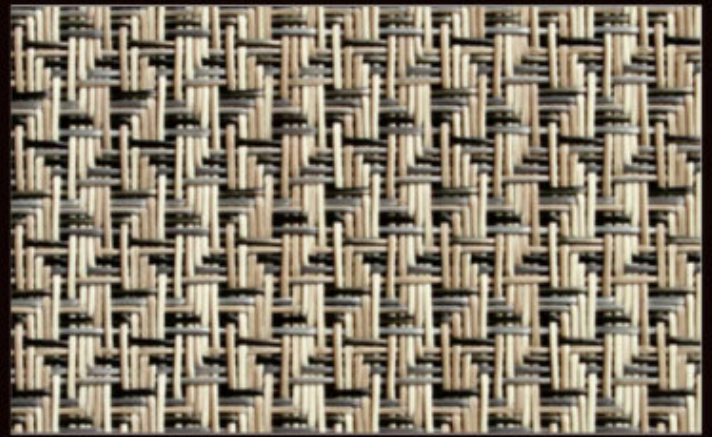


Triangle

0918 

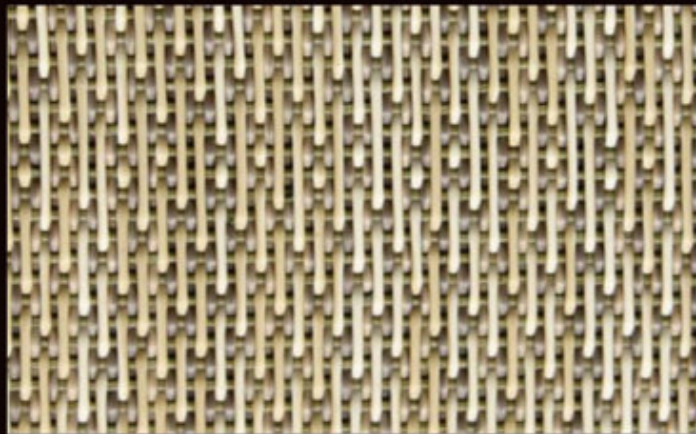


Curry

1011 

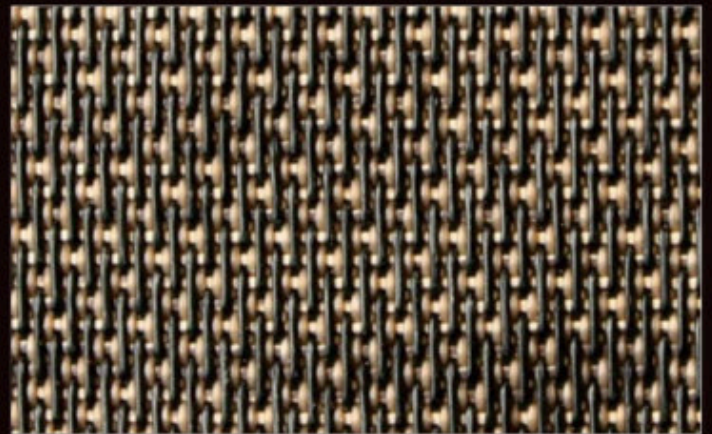


Teak

1015 

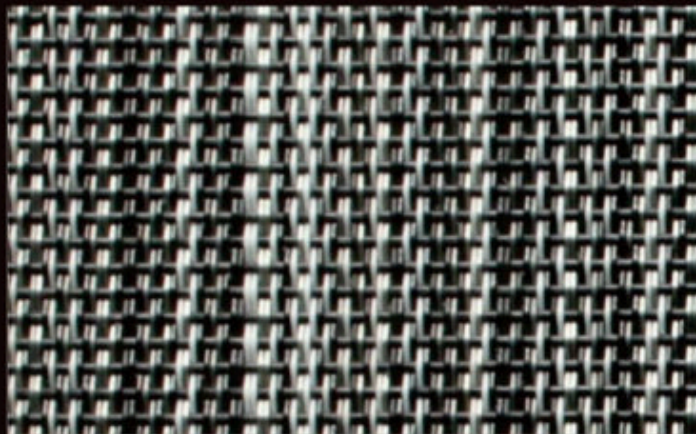


Bronze

0923 

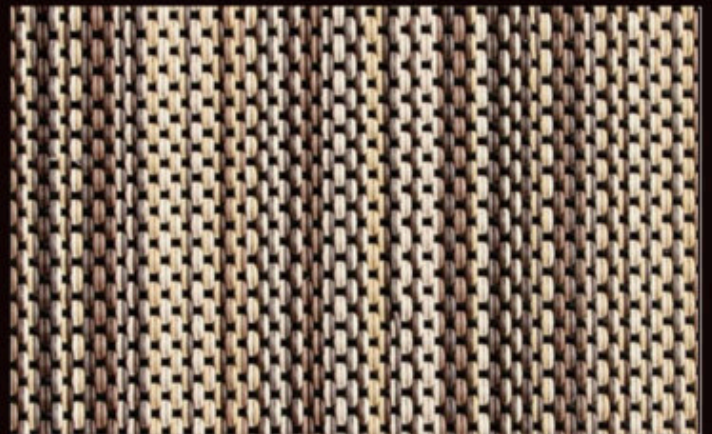

Sesame

0924 

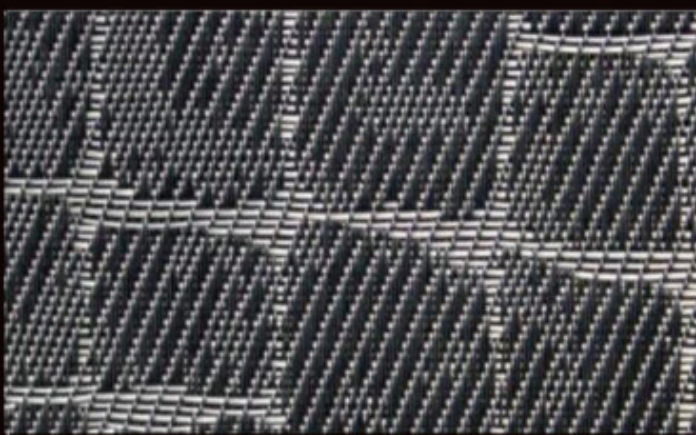

Alligator

0975 

Woven vinyl textiles are strong, durable (Class 33 EN685) and flame resistant (EN14041), when it reinforced with High density and resilient foam which dramatically bring you a comfortable, noise isolated experience. As well as a wide range of colors will no doubt impact your emotions, appeal to your senses to touch it. From the perspective of maintenance they are easy to clean (En423 En438). All of these auteentic features make it to be one of favorite choice for interior designs and Decoration industry. Also make it possible as the symbol of strength,sustainable, comfort and personalization.


NOTE: Slight color variations between dye lots may occur.
If exact color is required, please ask for a cutting from current stock.



Tiles



Rolls

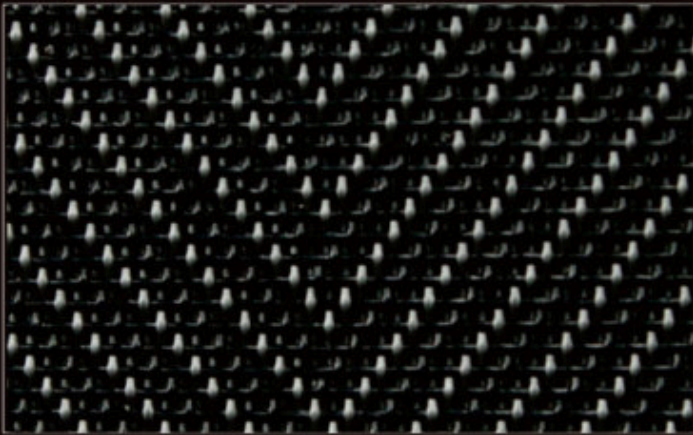


Stretch

1024




Java

1022

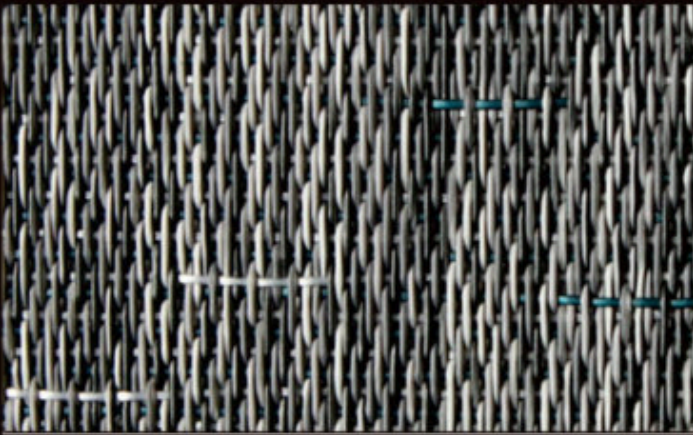


Pewter

1031

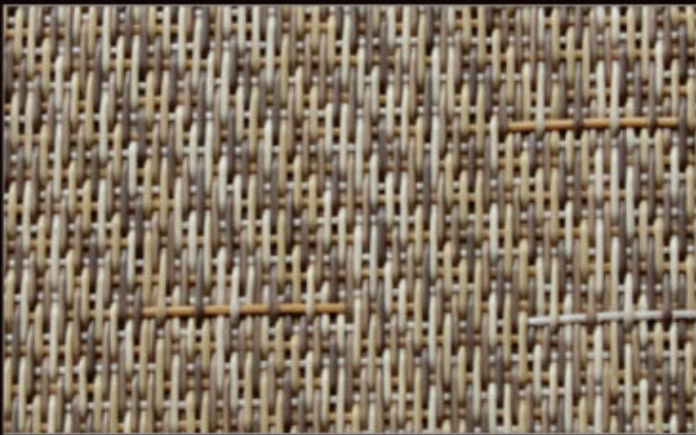


Pebble

1032

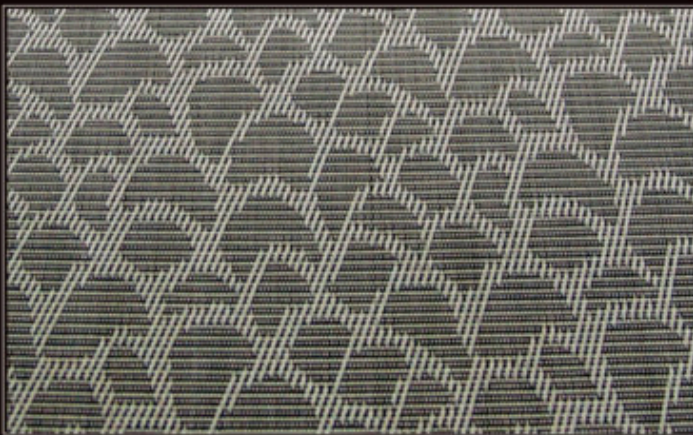


Conch

0929

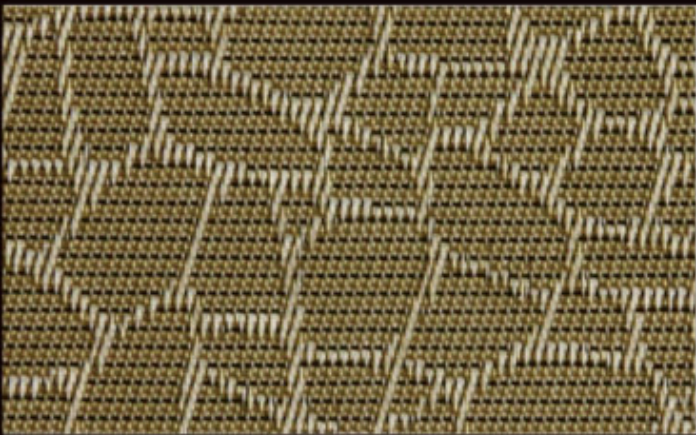


Pantano Gold

1106

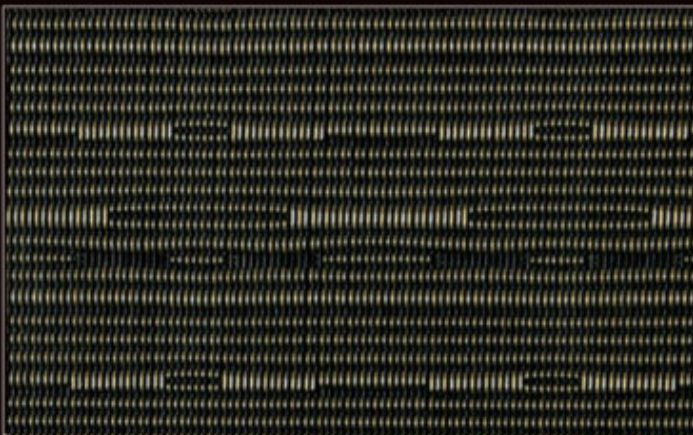

Black

0925

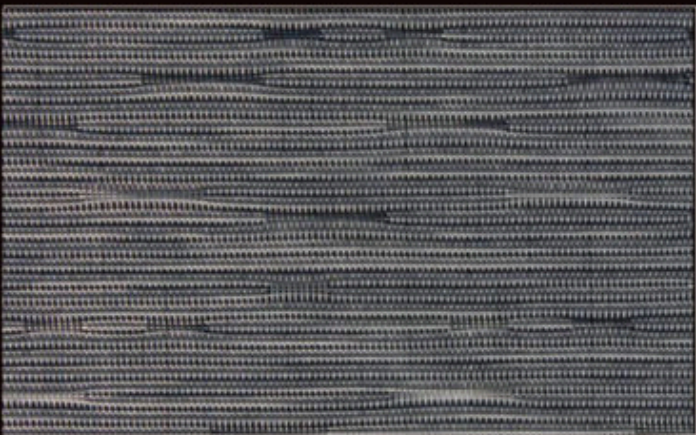


Fumo

0976




Granito Quarzo

0972 

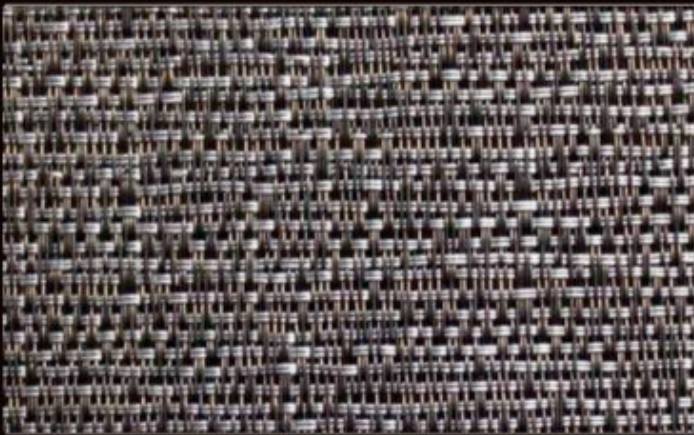


Granito Night

0971 

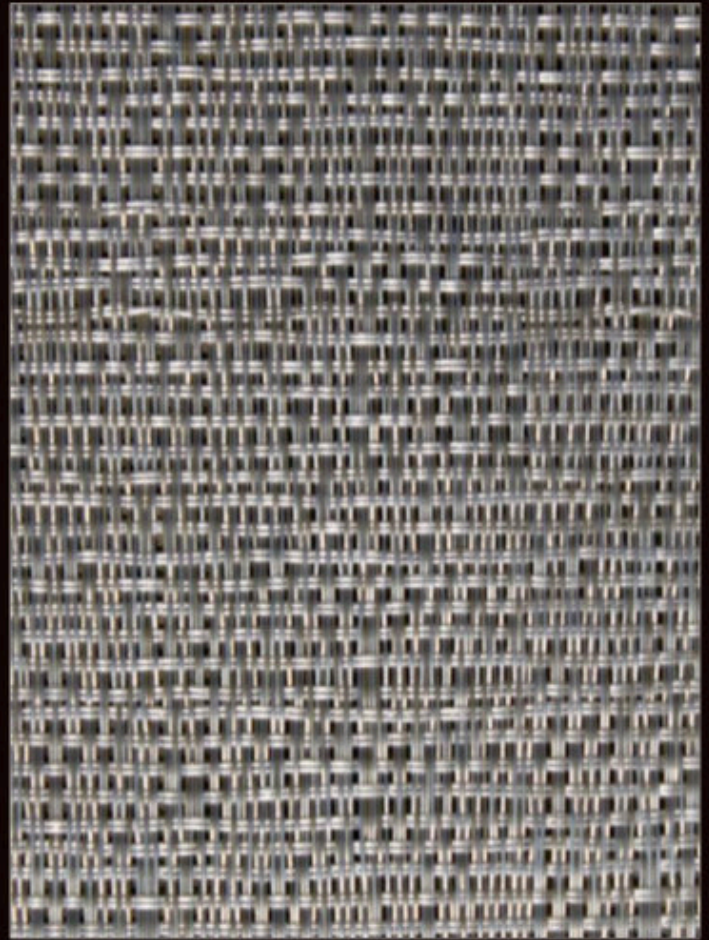


Granito Brown

0973 

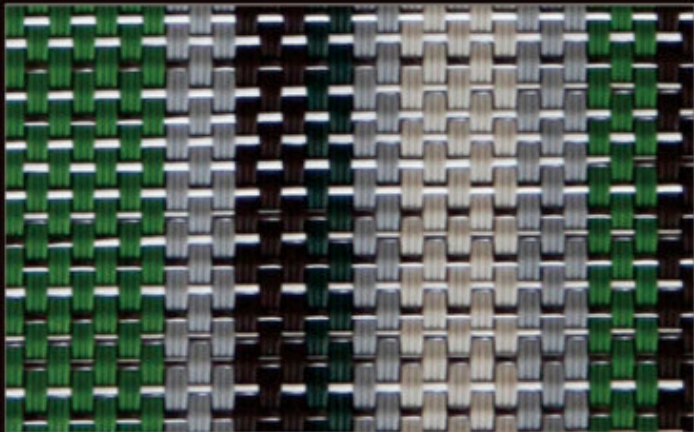


Trucco Green

1120 

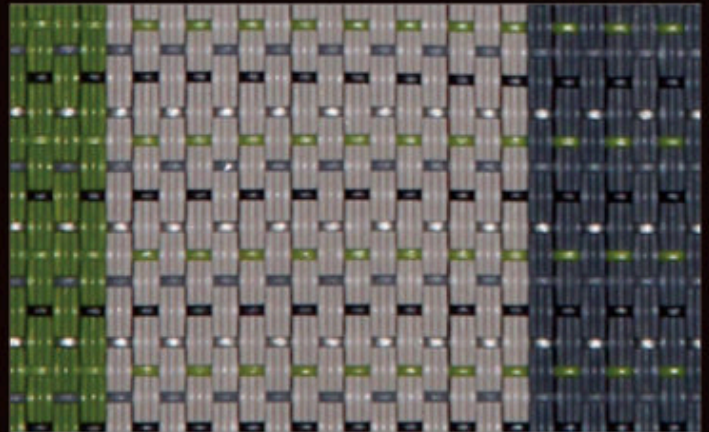


Barcode Green

1110 

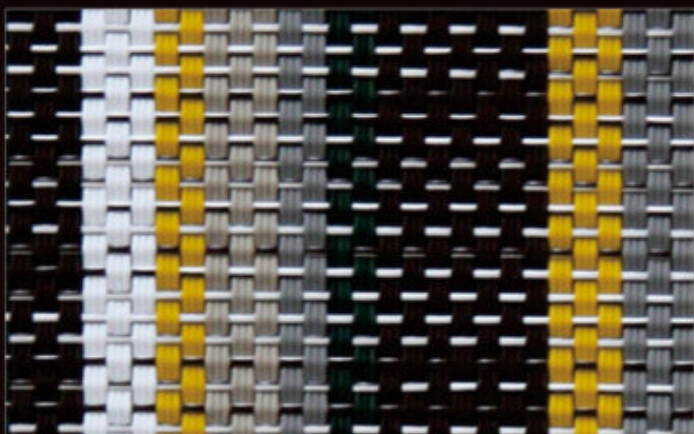

Trucco Yellow

1122 

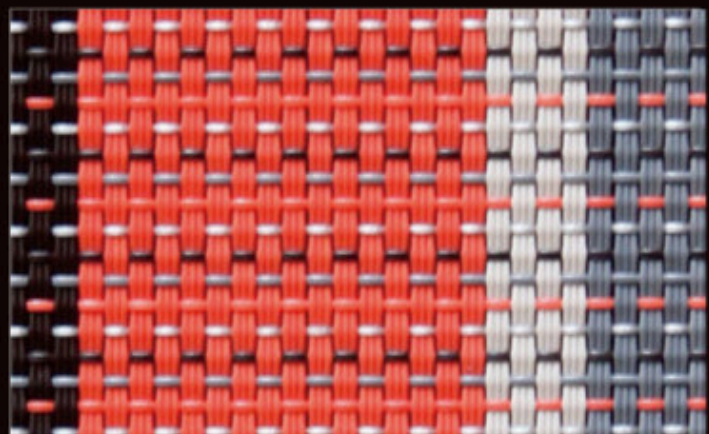

Barcode Brick

1111 



Technical informations:

construction: woven vinyl flooring, product standard EN 15114

Roll/2m Width

Classification		EN 685	33 heavy commercial applications
Colour fastness to light		EN ISO EN105-B02	>6
Fire classification		EN ISO 13501	Cfl-s1
Body voltage		ISO 6356	<2kv
Castor chair suitability		EN 985	continuous use
Slip resistance		EN 14041 Technical Class DS	>0.3
Dimensional stability		ISO 2551	<0.33
Impact noise reduction		EN ISO 140-8	$\Delta L_w=22$
Resistance to stains		EN 423	Rating 0 No effect (highest grade)
Thickness		EN 428	4.0mm $\pm$ 0.01
Roll length		EN 426	15-25m
Roll width		EN 426	2m $\pm$ 0.01
Roll weight		EN 430	2.5kg/m2 +/-

Tiles/Shapes

Castor chair resistance		EN 425	No Effect
Residual indentation		EN 433	0.08mm
Dimensional stability		EN 434	0.05% (X+Y direction)
Curling		EN 434	1.5mm
Thermal conductivity		EN 12667	0.0416W/m.K
Thermal resistance		EN 12667	0.0639m.K/W
Assessment of static electrical propensity		ISO 1815	2.1KV
Acoustics		ISO 140	$\Delta L_w=14dB$
Fire rating		EN13501-1 EN ISO 11925-2 EN ISO 9239-1	Bfl-s1
Formaldehyde release		EN717-1	E1
Thickness		ISO 1765	3.2mm
Weight		ISO 8543	3.6kg/m2+/-
Tile dimension		500X500mm	16 pcs/box, 4m2

NOTE: This information is offered for your general guidance only. It's accurate to the best of our knowledge and is not intended to relieve the user from its responsibility to investigate and understand other pertinent sources of information and to comply with all laws and procedures applicable to the safe handling and use of this material. Final determination of the suitability of any product for an application rests with the user.

Textlyweave patterns are designed to simulate a hand worked natural material. Subtle variations in colour, and shading should be anticipated, as these variations are part of the manufacturing process, and add to the richness and beauty of the product.

If exact colour is required, please ask for a cutting from the same stock to avoid too much difference.

IMPORTANT: Textlyweave patterns are designed to simulate a hand worked natural material. Subtle variations in colour, and shading should be anticipated, as these variations are part of the manufacturing process, and add to the richness and beauty of the product.

Project and technical support

Regarding to installation and care, contact with local agents or directly to us on www.textlyweave.com



6 P
FREE

AZO
FREE



Global Sources

Verified Supplier ★★★★★

texlyweave®
texlymat®

THE TEXLYWEAVE FLOORING

