





texlyweave<sup>®</sup>  
texlymat<sup>®</sup>  
THE TEXLYWEAVE FLOORING

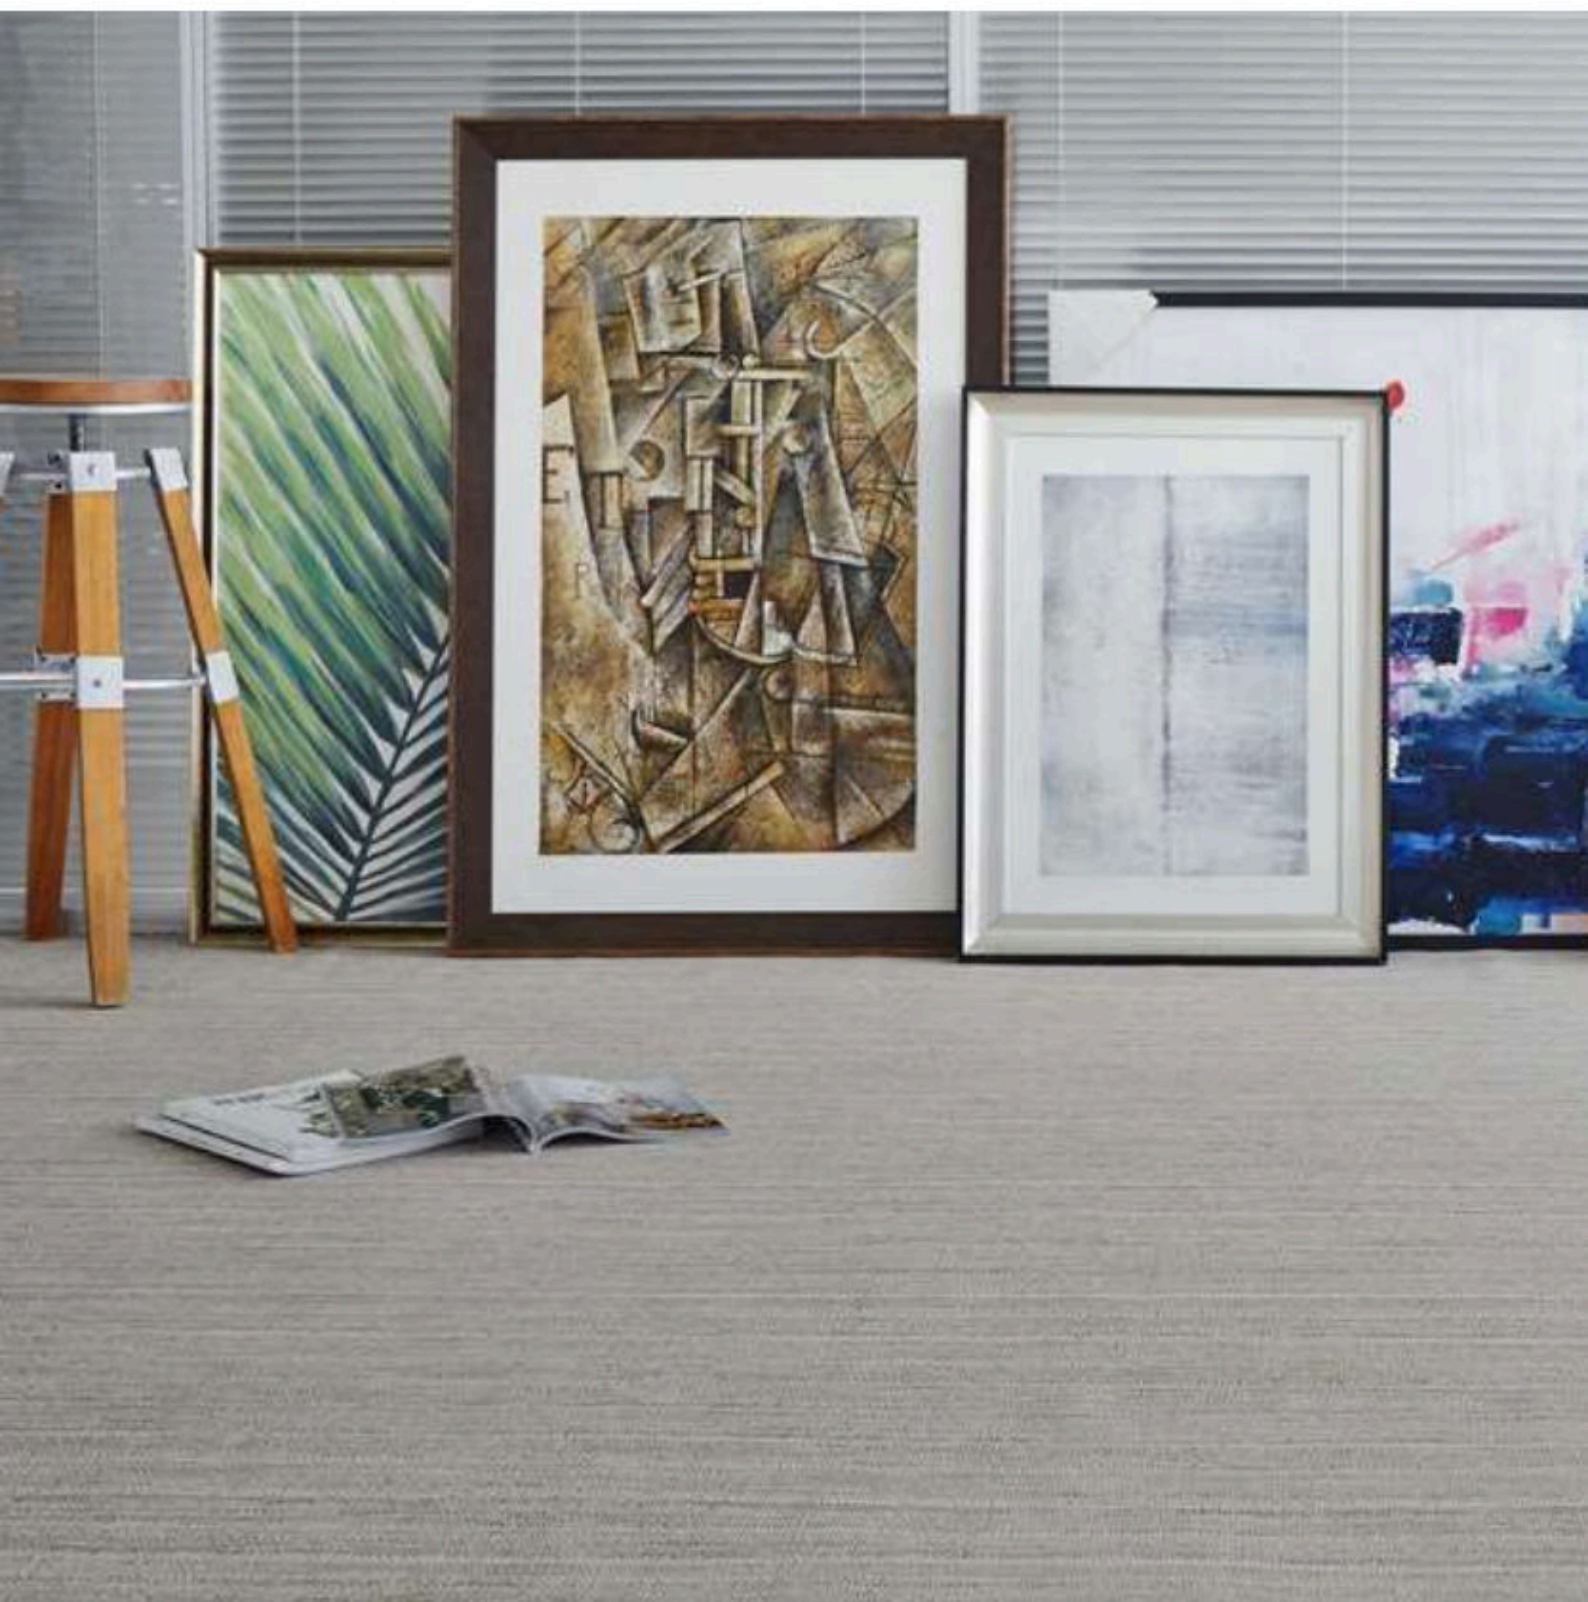

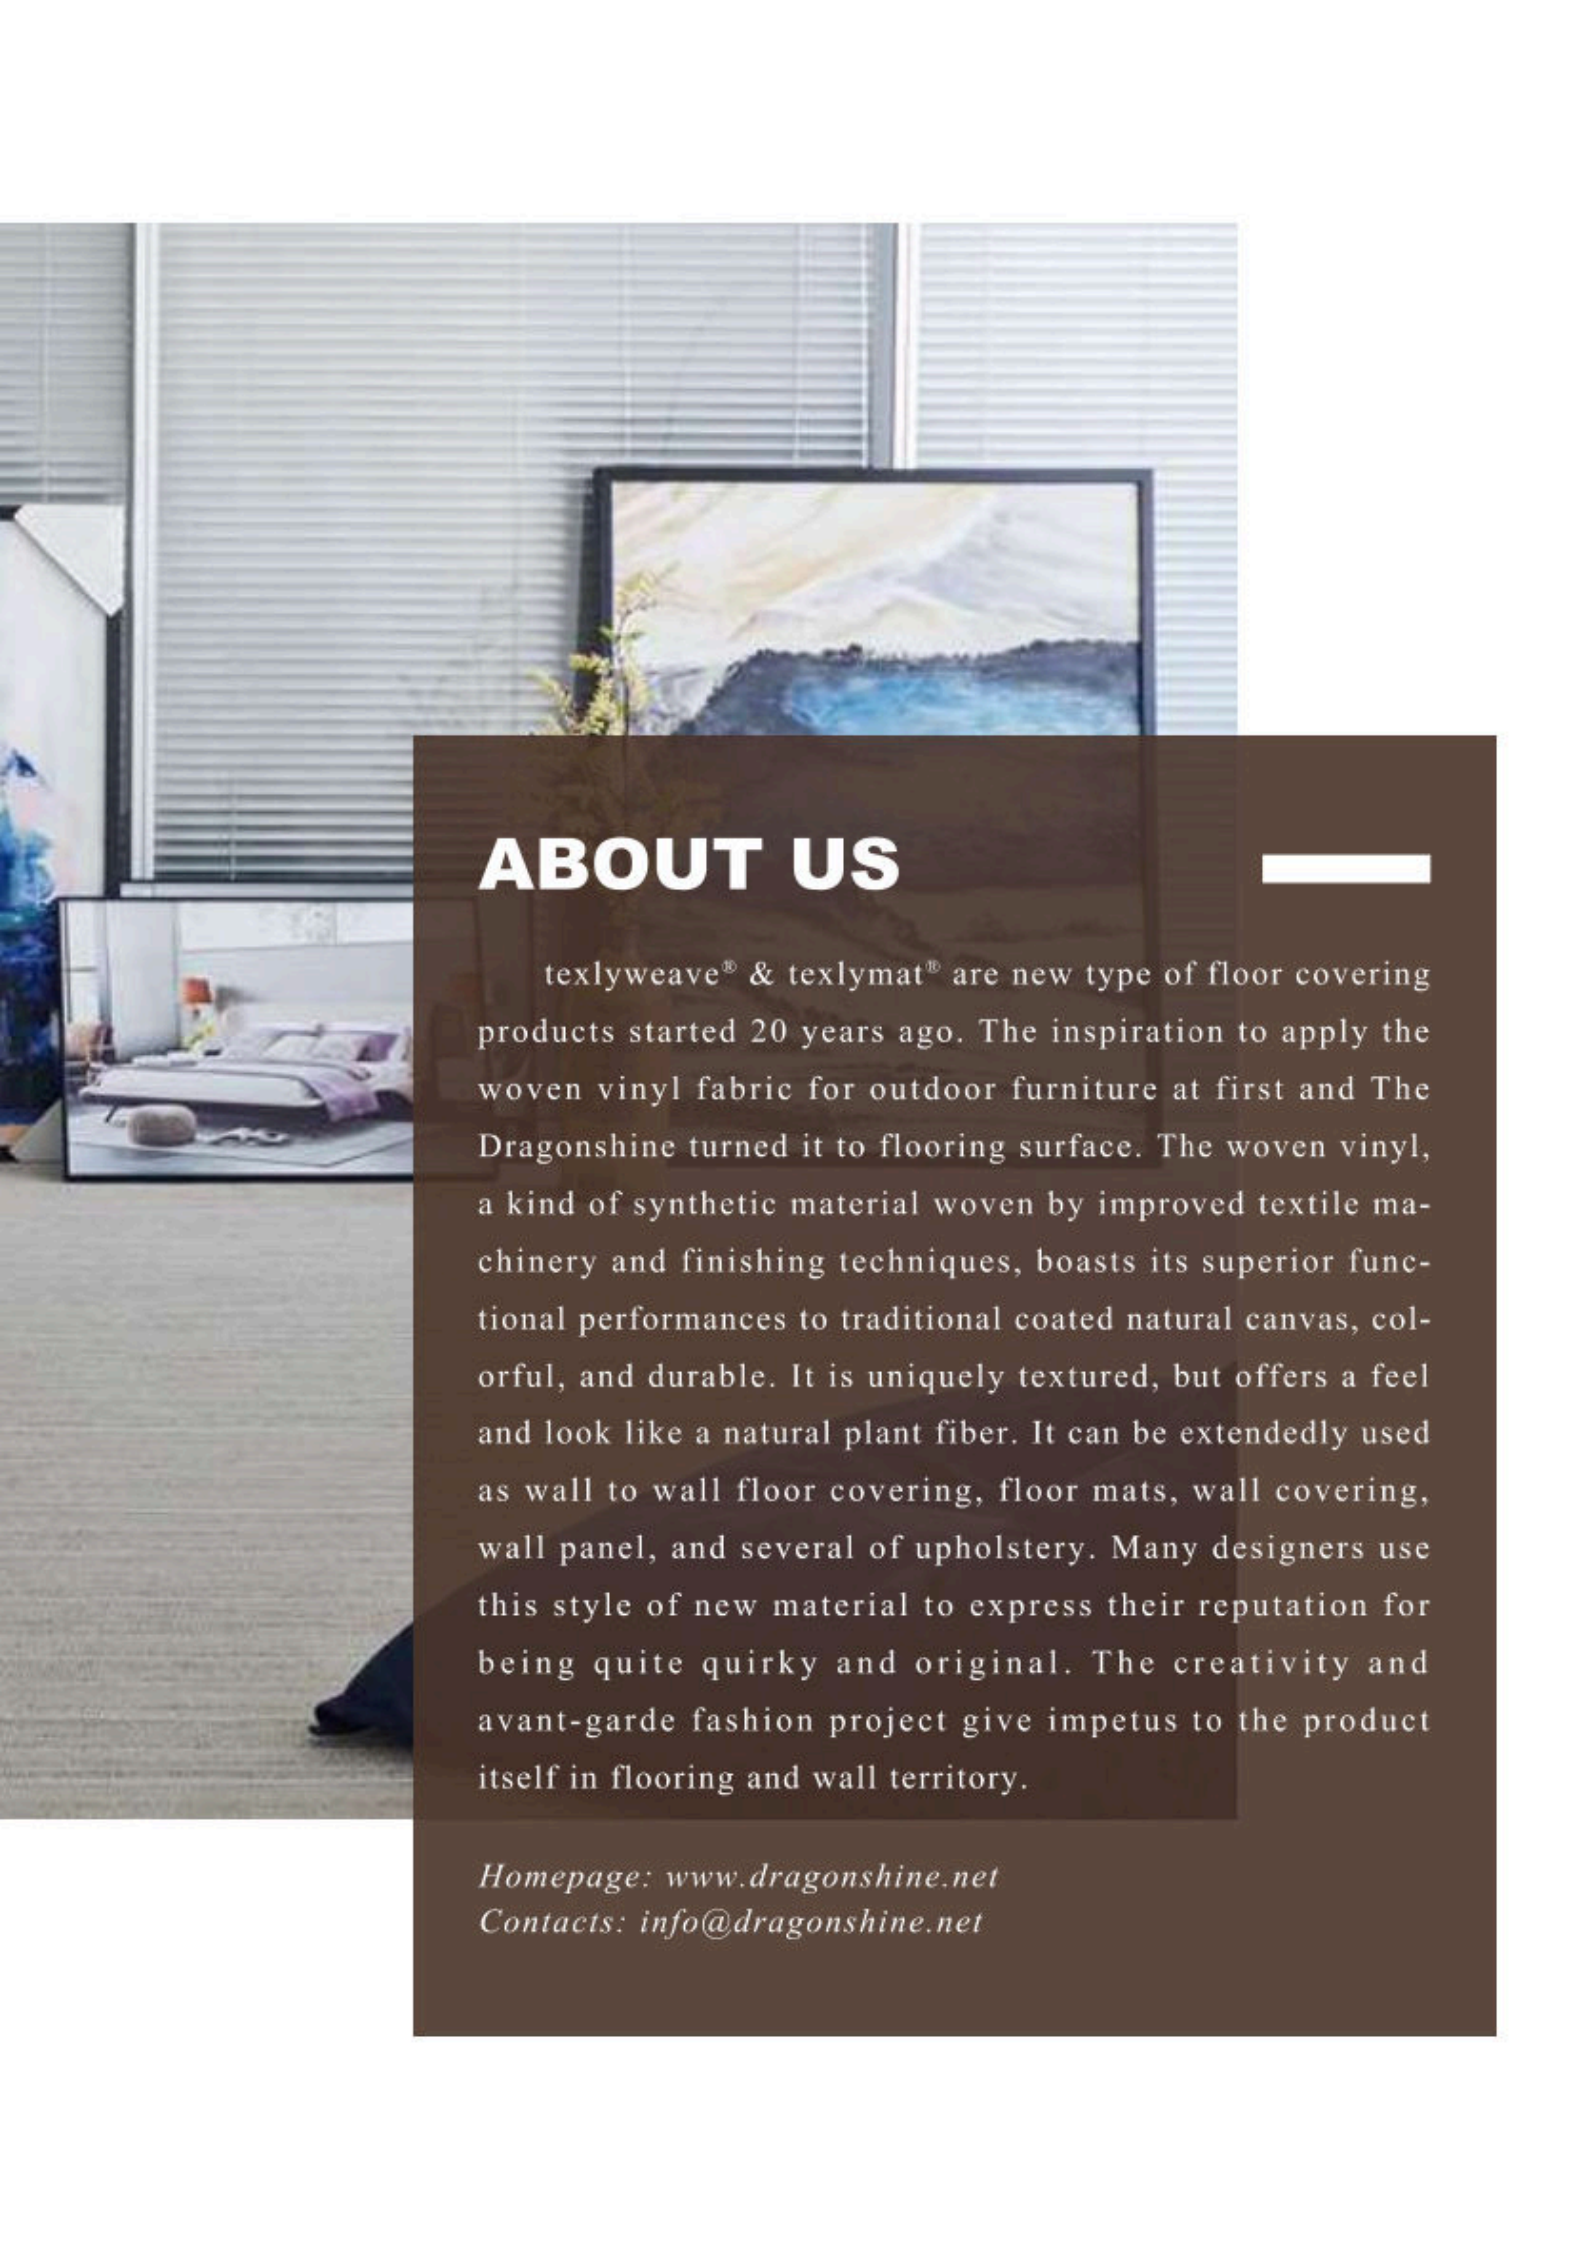

## ABOUT US

texlyweave® & texlymat® are new type of floor covering products started 20 years ago. The inspiration to apply the woven vinyl fabric for outdoor furniture at first and The Dragonshine turned it to flooring surface. The woven vinyl, a kind of synthetic material woven by improved textile machinery and finishing techniques, boasts its superior functional performances to traditional coated natural canvas, colorful, and durable. It is uniquely textured, but offers a feel and look like a natural plant fiber. It can be extendedly used as wall to wall floor covering, floor mats, wall covering, wall panel, and several of upholstery. Many designers use this style of new material to express their reputation for being quite quirky and original. The creativity and avant-garde fashion project give impetus to the product itself in flooring and wall territory.

*Homepage: [www.dragonshine.net](http://www.dragonshine.net)*


*Contacts: [info@dragonshine.net](mailto:info@dragonshine.net)*



Long lasting colours,  
Unique feel and modern  
look

# MOSS

Rated for Heavy Commercial Traffic  
Soil + Stain Resistant  
Mold + Mildew Resistant  
Gasoline, Grease and Motor Oil Re-  
sistant  
Ultra- Violet Stbe + Fade Resistant  
Easy to Clean

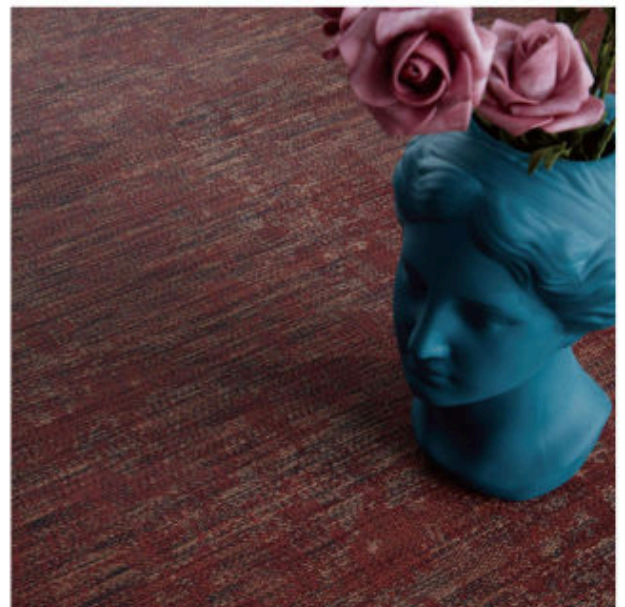


Weave your life,  
Weave your imaginations!




## MOSS




18001 Burgundy

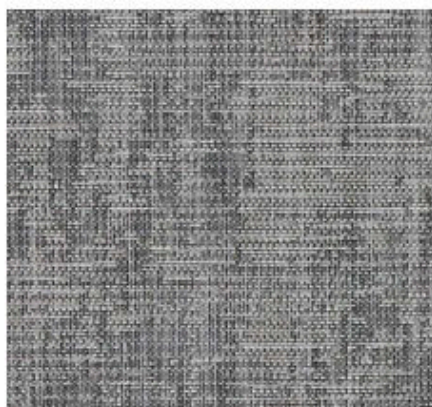


18002 Rail

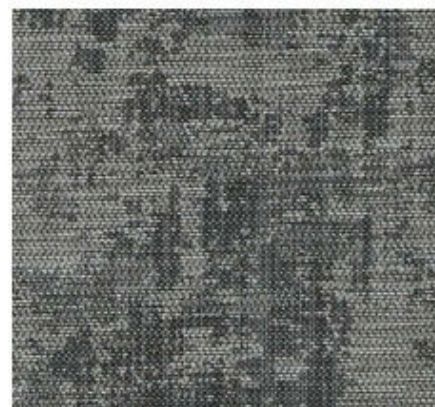

18003 Steely

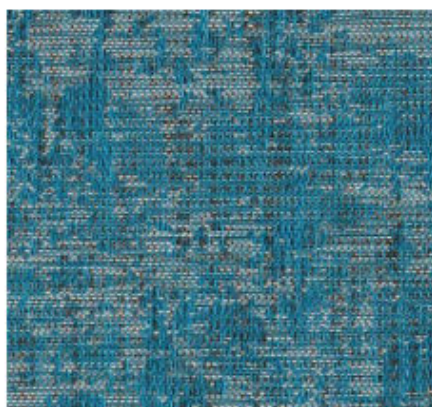

18005 Lago

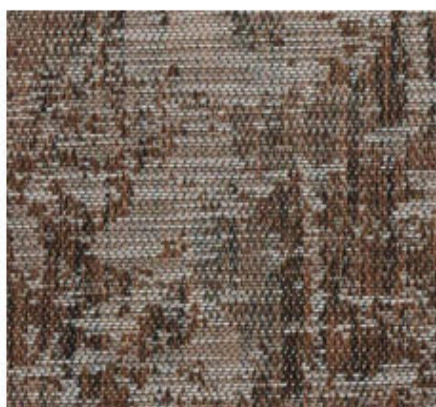

18004 Coco



18006 Tabac



18007 Wasabi

texlyweave<sup>®</sup>  
texlymat<sup>®</sup>  
THE TEXLYWEAVE FLOORING



# CROCHET



19005 Crochet Denim



19006 Crochet Jasper




19007 Crochet Peach




19008 Crochet Quarry



[www.texlyweave.com](http://www.texlyweave.com)

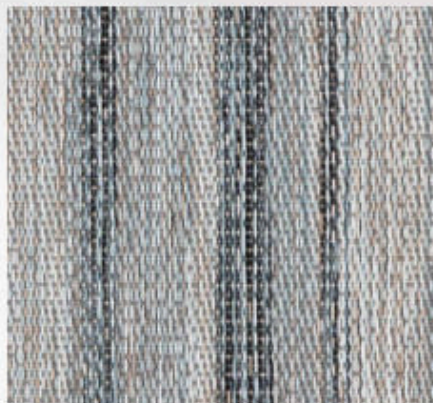

16042 Grainy Lime

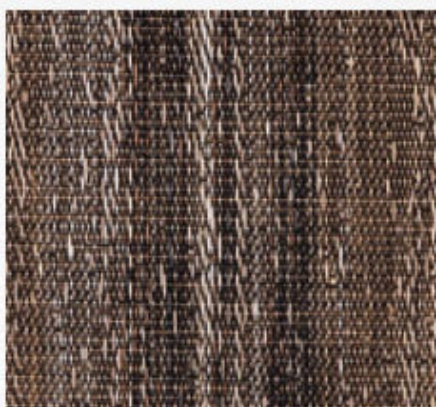


16017 Grainy Golden




16043 Grainy Beige


## GRAINY

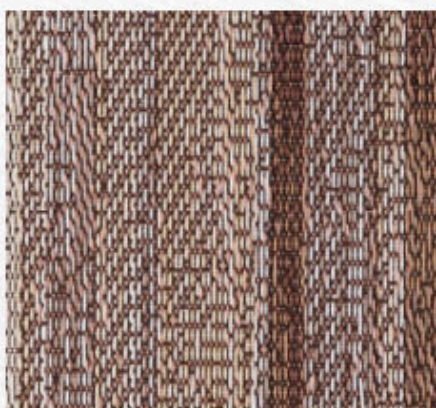


16044 Grainy Chocolate

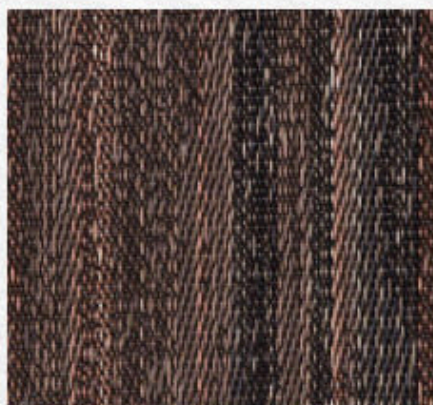

16045 Grainy Brown

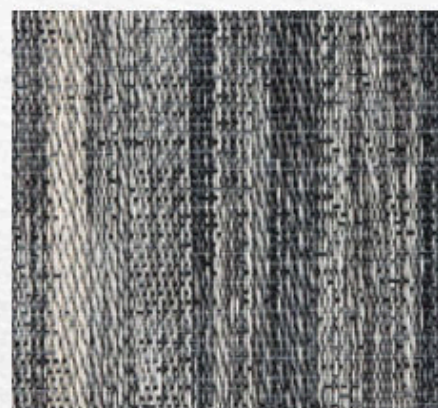

16046 Grainy Grey

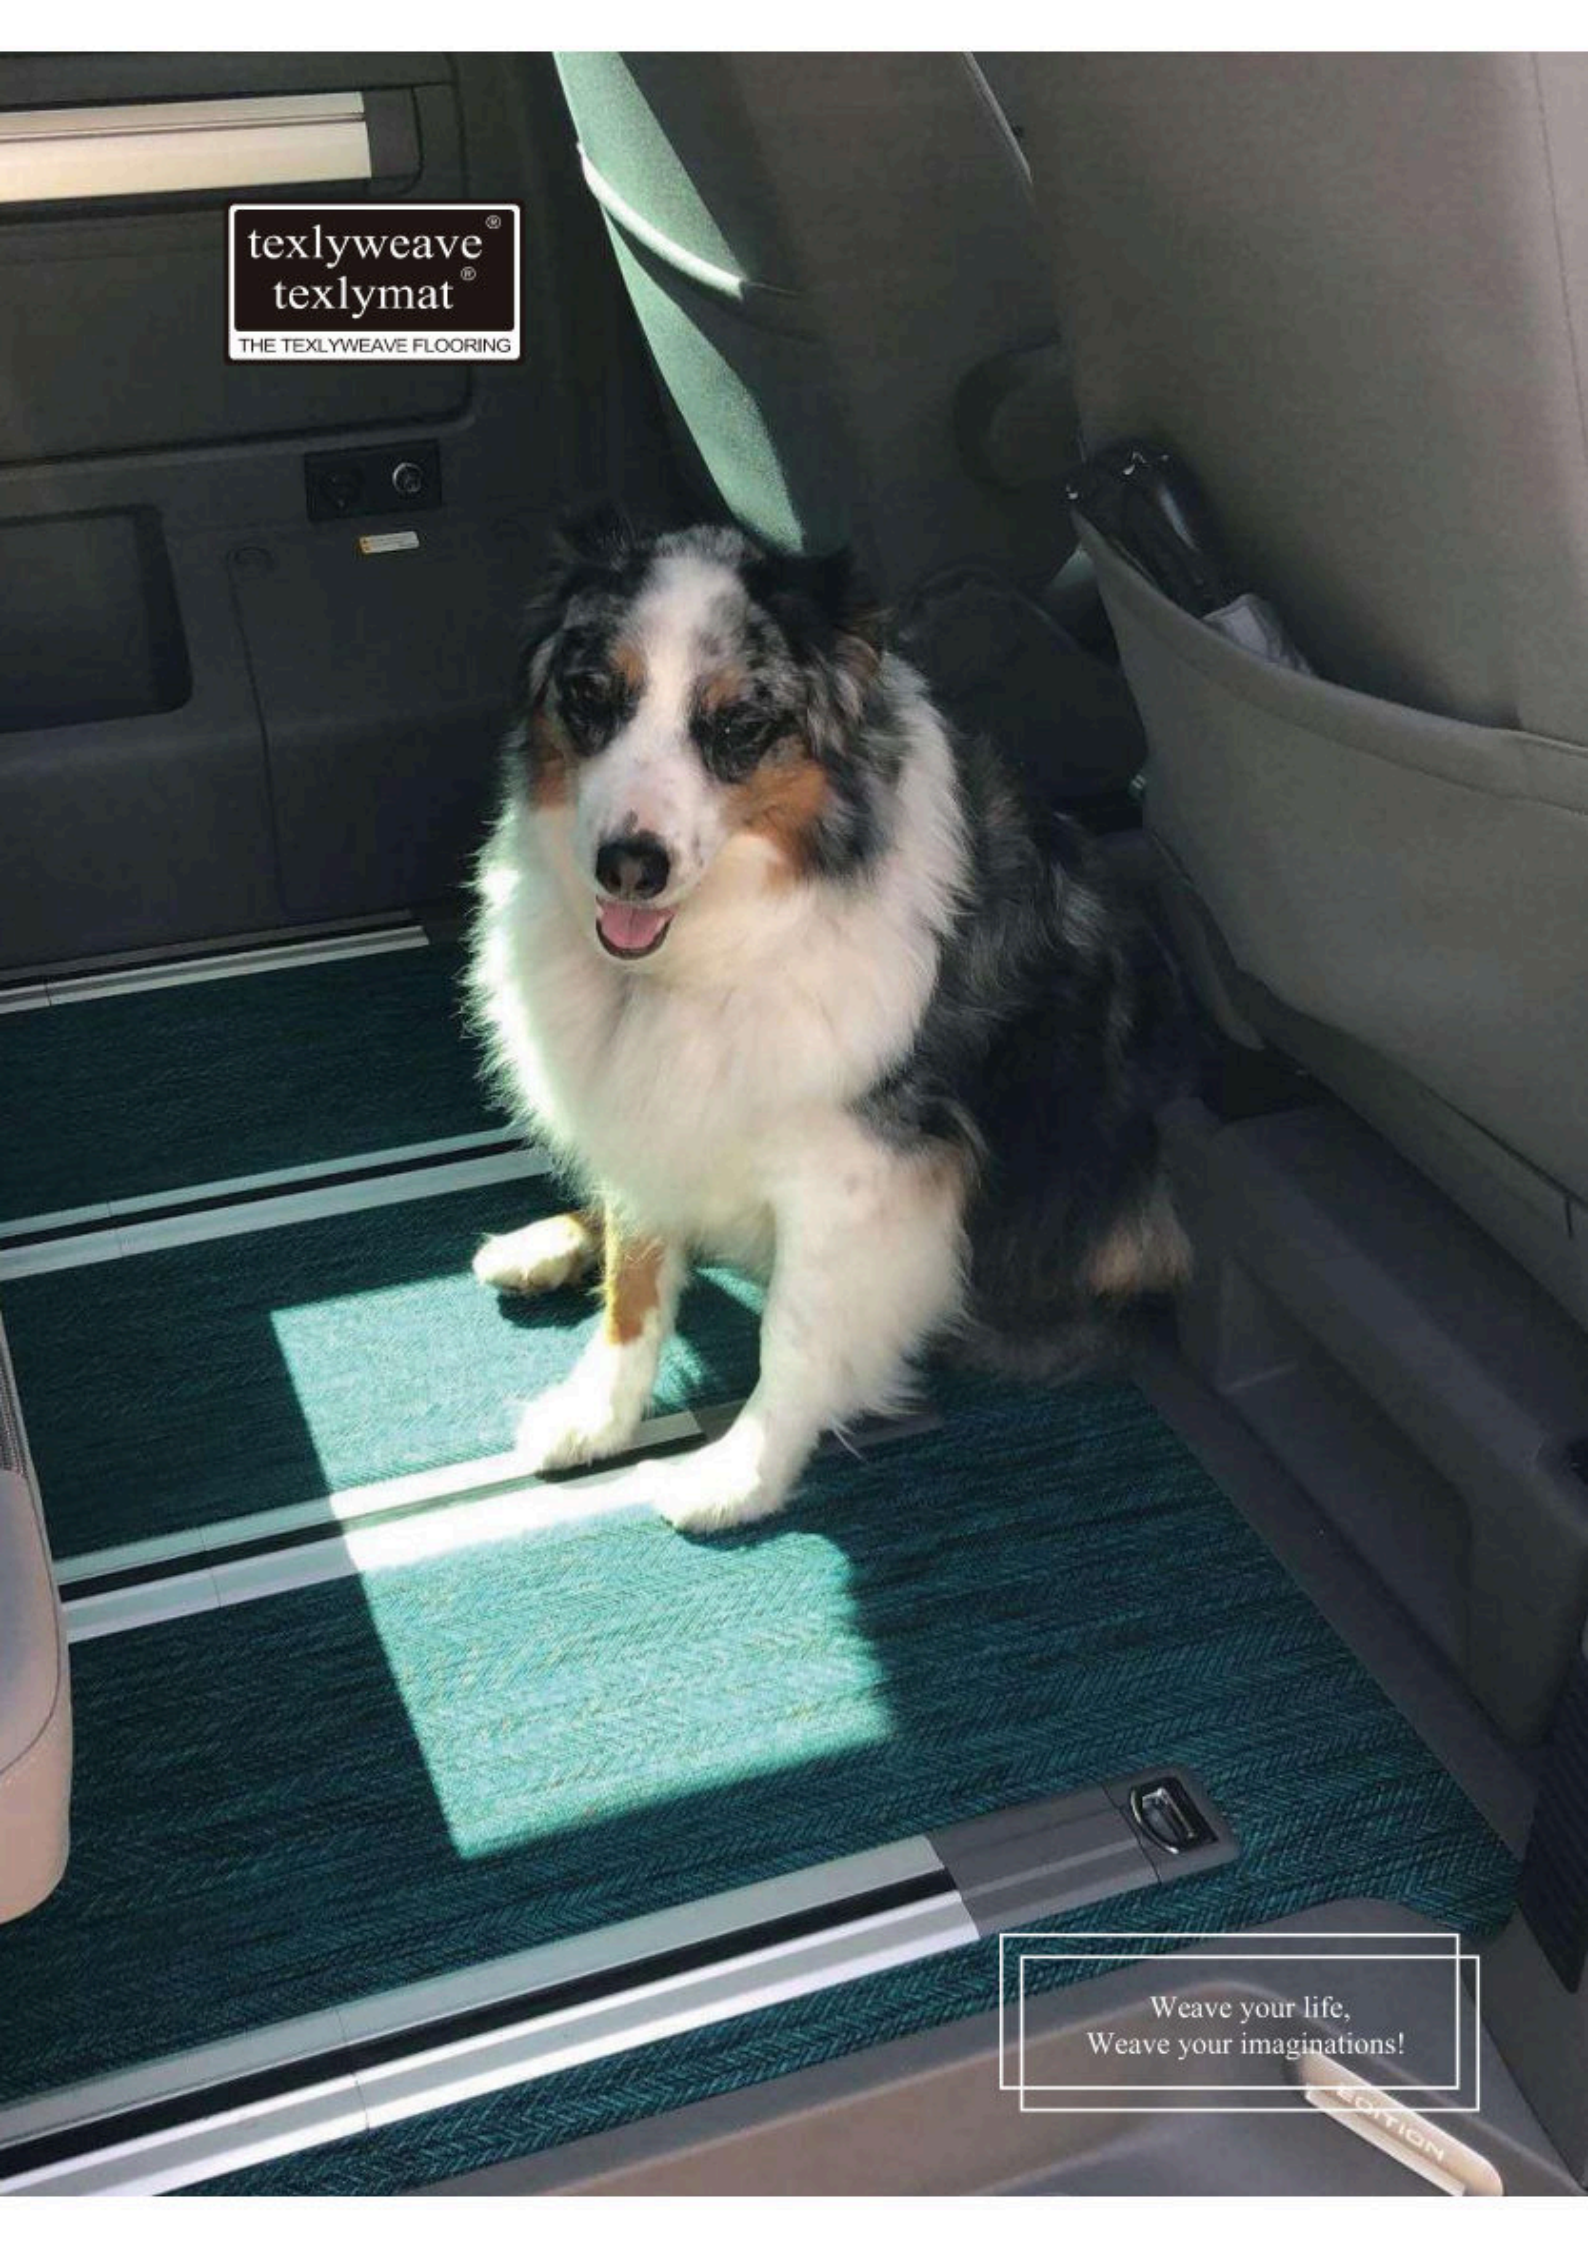
A photograph of a dog, possibly a Shetland Sheepdog, sitting on a green patterned car floor mat. The dog has white, black, and tan fur and is looking towards the camera with its mouth slightly open. A bright light source, likely a window, is shining on the dog and the mat, creating a strong highlight. The background shows the interior of a vehicle, including a grey seat and a black door panel.

texlyweave<sup>®</sup>  
texlymat<sup>®</sup>  
THE TEXLYWEAVE FLOORING

Weave your life,  
Weave your imaginations!



# HERRINGBONE

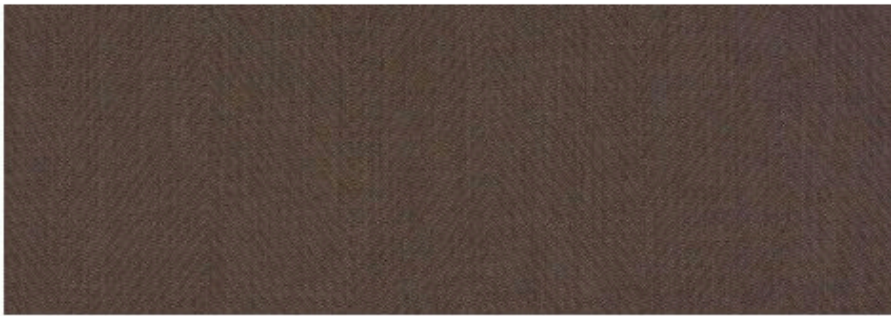


1022 Herringbone Java




1024 Herringbone Stretch



19025 Herringbone Oyster

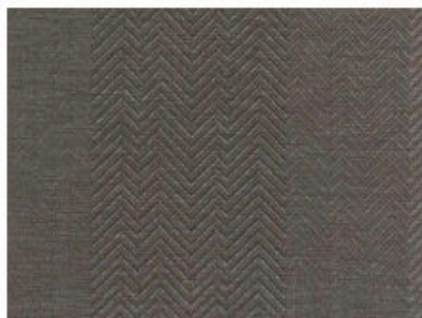

19026 Herringbone Plumby

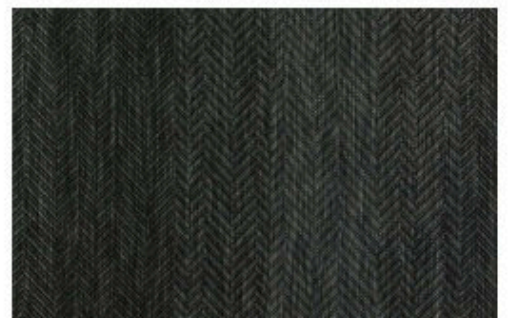


19027 Herringbone Blae



19028 Herringbone Denim





19029 Herringbone Baltic

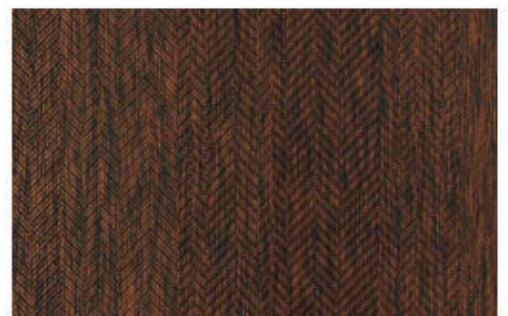

19030 Herringbone Bran


texlyweave<sup>®</sup>  
texlymat<sup>®</sup>  
THE TEXLYWEAVE FLOORING

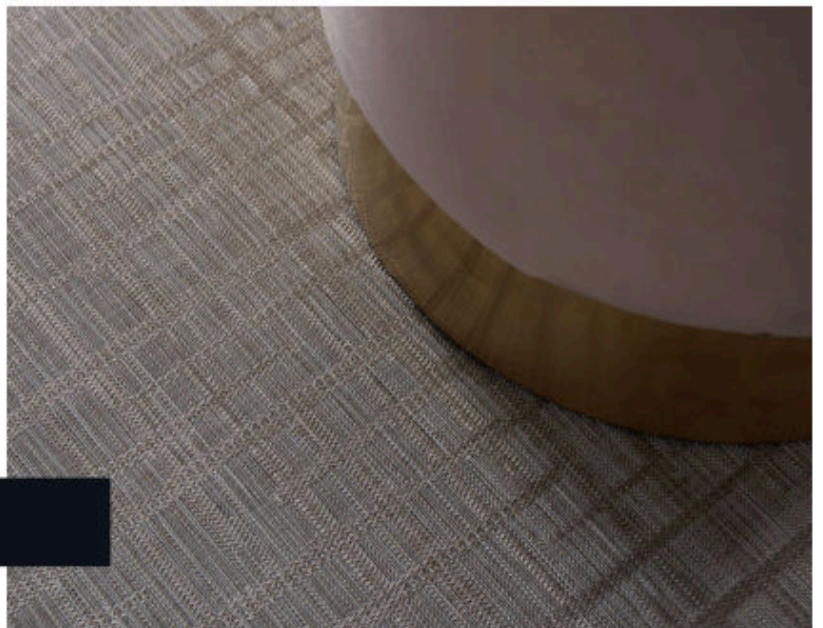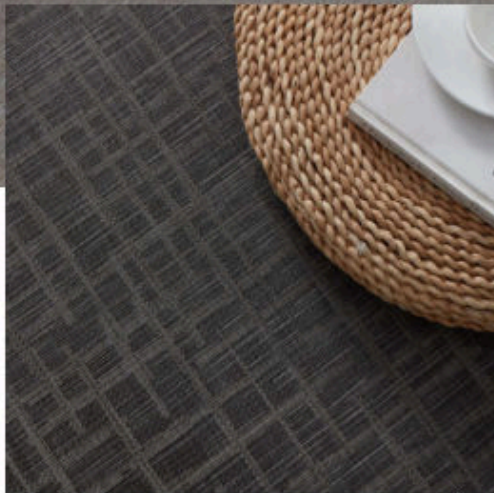


[www.texlyweave.com](http://www.texlyweave.com)




## MESHWORK

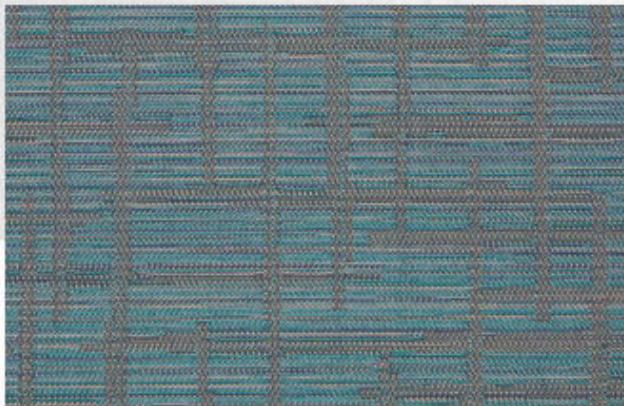


18026 Meshwork jungle

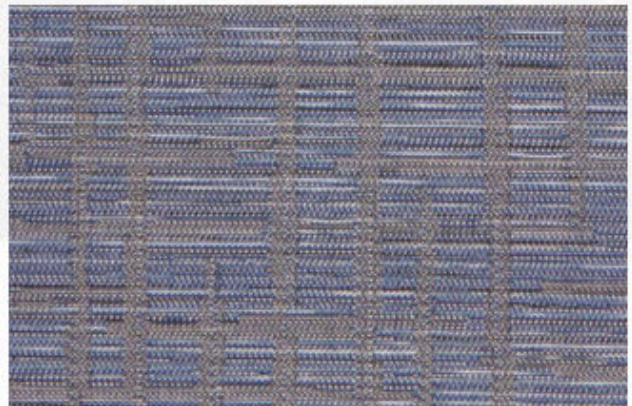

18027 Meshwork stonewash


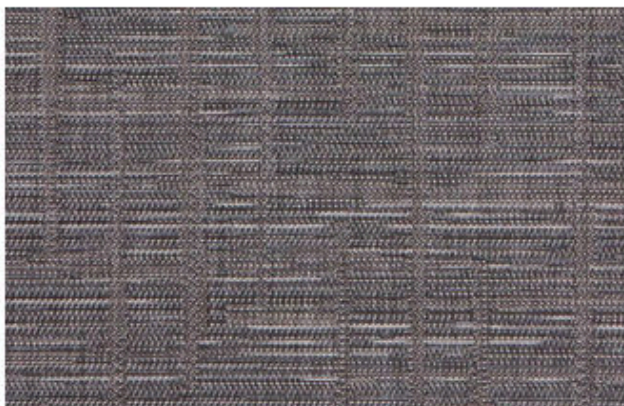


18028 Meshwork quarry

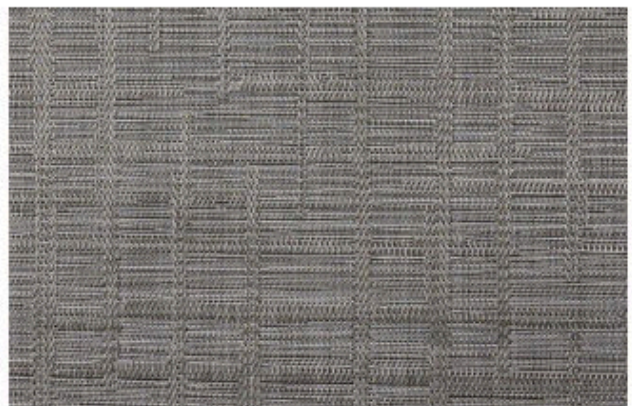

18029 Meshwork cinder


texlyweave<sup>®</sup>  
texlymat<sup>®</sup>  
THE TEXLYWEAVE FLOORING

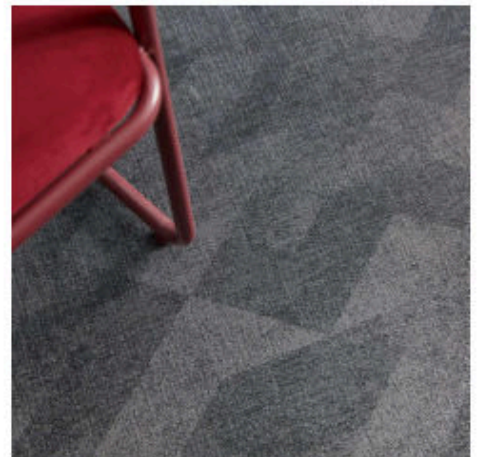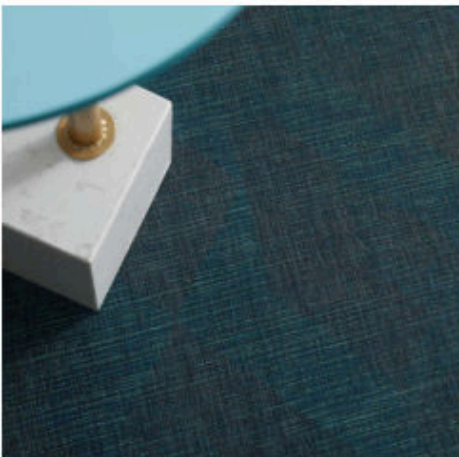

# PATCHER




19001 Patcher denim

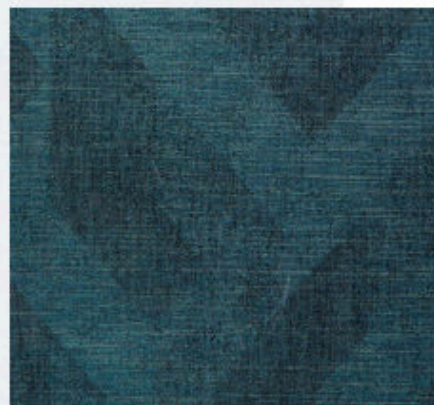

19002 Patcher jasper



19003 Patcher Peach

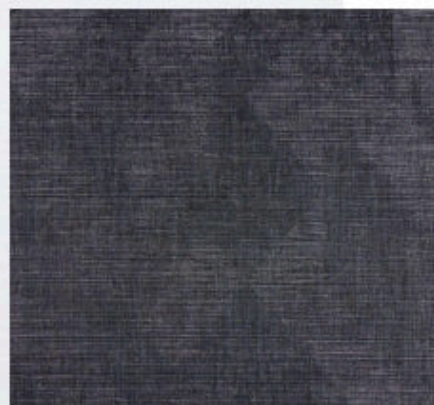

19004 Patcher quarry




## RAMP


---




19013 Ramp Boulder

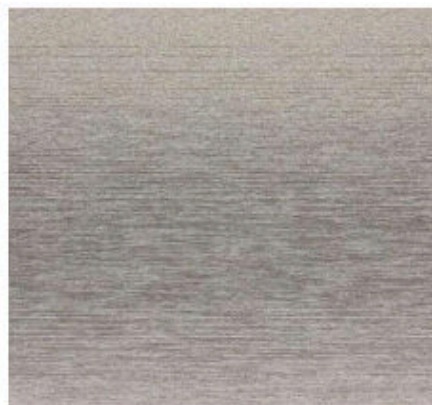

19014 Ramp Slate

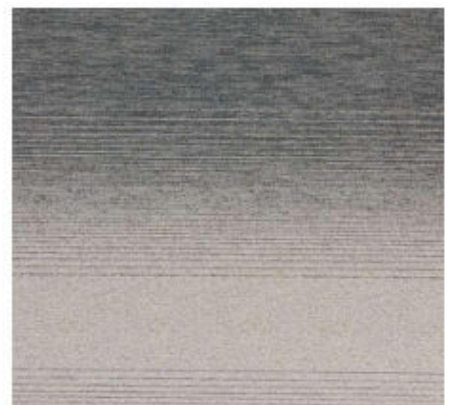

19015 Ramp Break

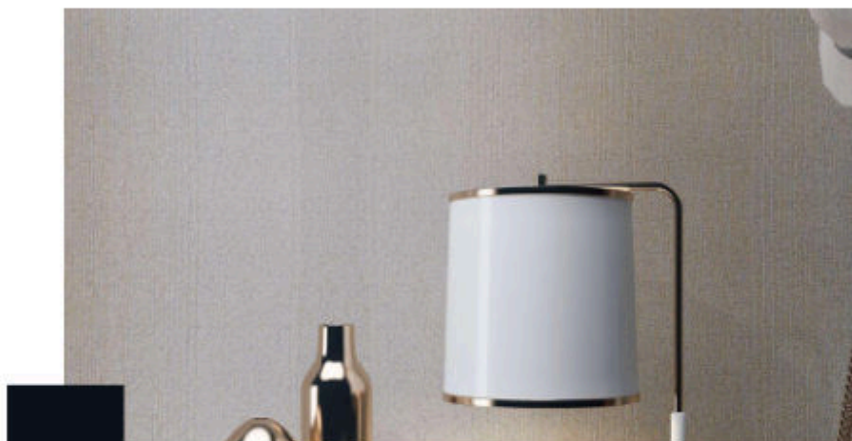

---


Weave your life,  
Weave your imaginations!



19016 Ramp Rock




19017 Ramp Jade

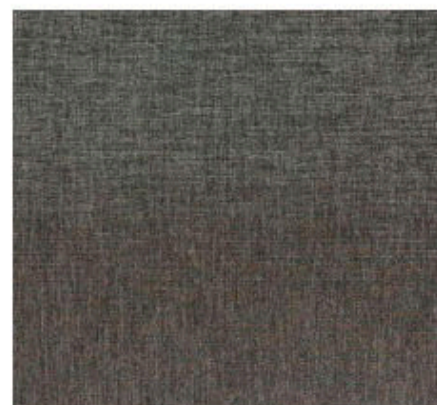


19018 Ramp Brown

texlyweave<sup>®</sup>  
texlymat<sup>®</sup>  
THE TEXLYWEAVE FLOORING

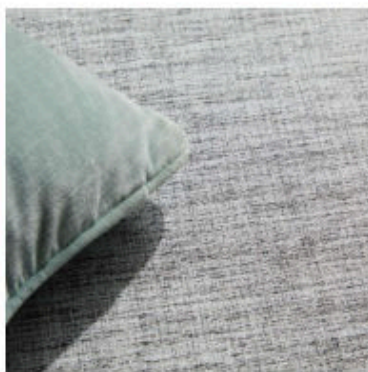


[www.texlyweave.com](http://www.texlyweave.com)


# RANDOM

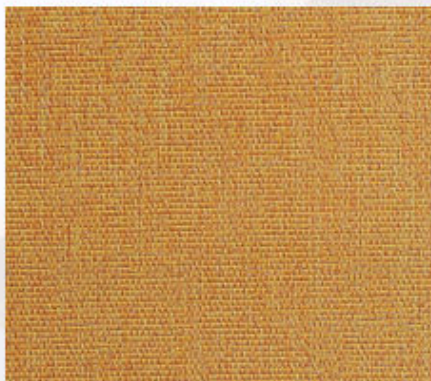

17014 Calendula

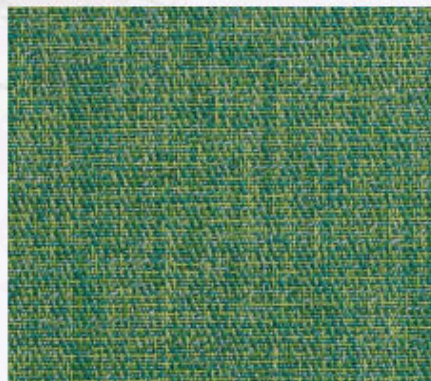


17015 Agave

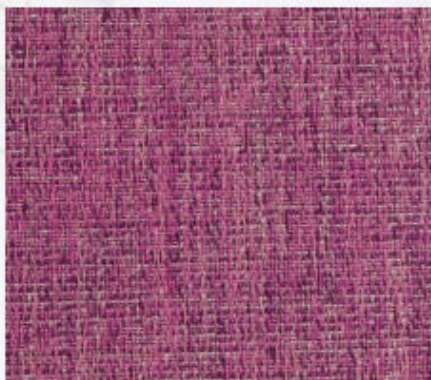


17016 Matthiola



17017 Myosotis

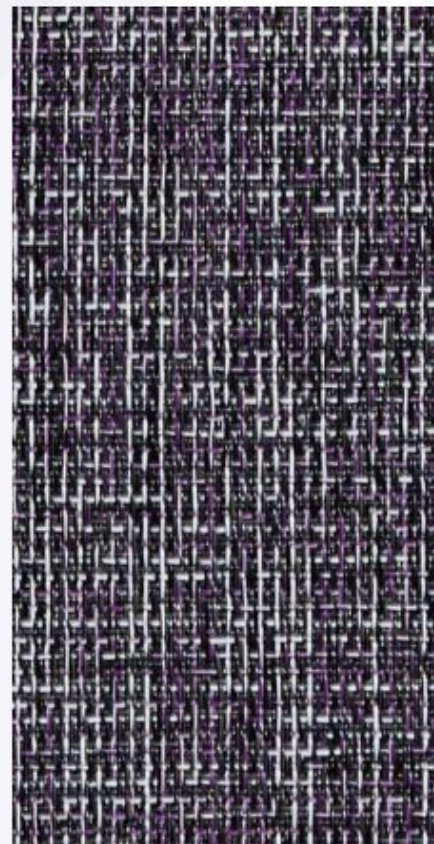

17018 Iris

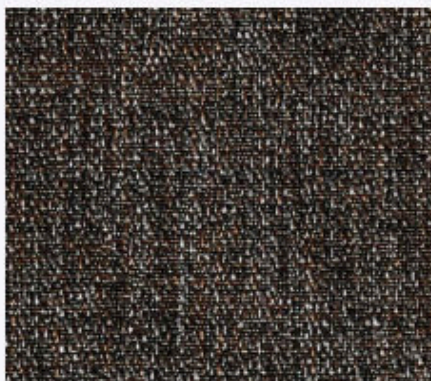


17019 Vine



17020 Stalactice





17021 Cement

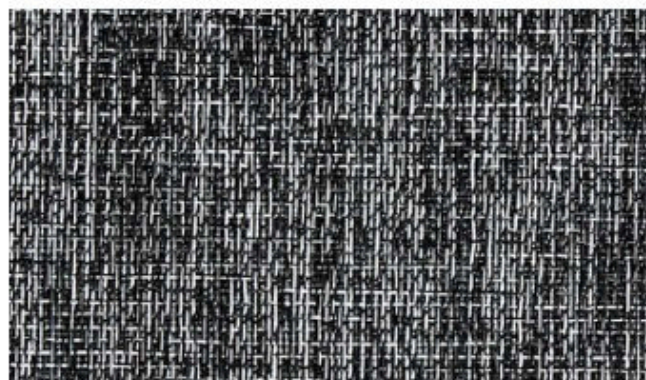

17022 Black Brick


texlyweave®  
texlymat®

THE TEXLYWEAVE FLOORING

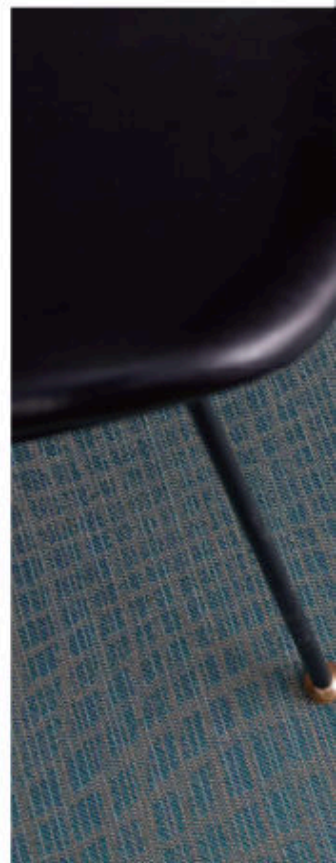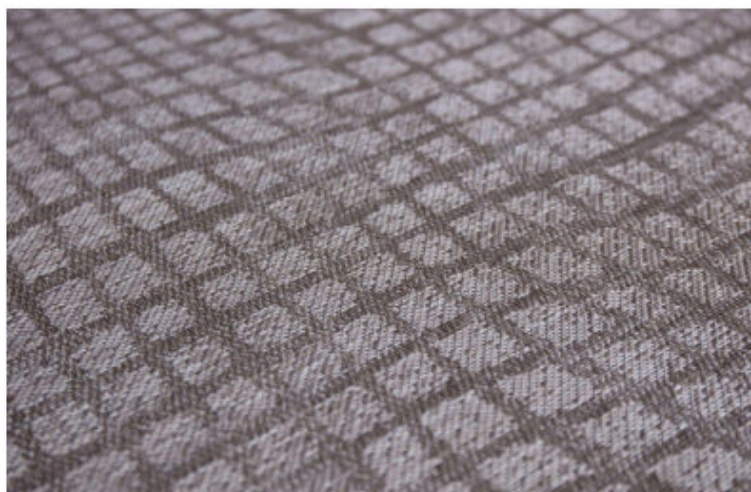



# SURFACE

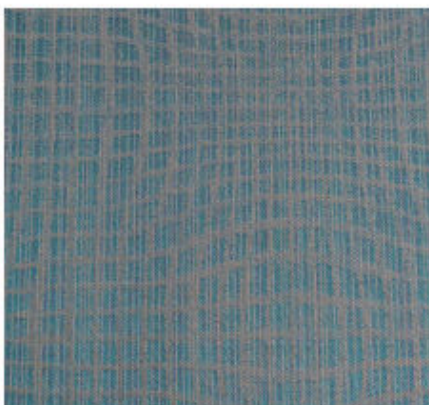

18030 Surface jungle




18031 Surface stonewash




18032 Surface quarry

18033 Surface cinder





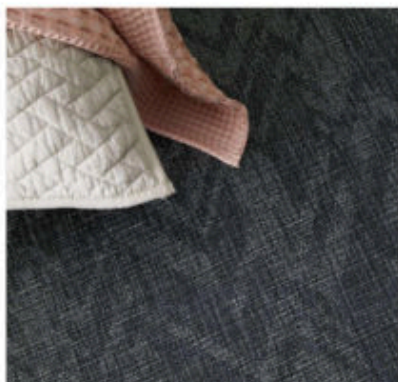

[www.texlyweave.com](http://www.texlyweave.com)

# TWEED



19009 Tweed denim



19010 Tweed jasper



19011 Tweed Peach



19012 Tweed quarry



### Technical information-1:

Construction: woven vinyl roll floor covering, product standard 1307:2014

|                                   |                                                                                     |                     |                                    |
|-----------------------------------|-------------------------------------------------------------------------------------|---------------------|------------------------------------|
| Classification                    |    | ISO 10874           | 33 heavy commercial applications   |
| Slip resistance                   |    | EN 13893            | 0.50, class DS                     |
| Content of pentachlorophenol(PCP) |    | CEN/TS 14494        | Not detected                       |
| Formaldehyde emission             |    | EN 717-2            | 0.122mg/m³·h                       |
| Castor chair resistance           |    | EN 985:2001-Test A  | r=5 (Intensive use)                |
| Colour fastness to light          |    | EN ISO 105-B02      | >6                                 |
| Impact noise reduction            |    | EN ISO 10140-3:2010 | ΔLw=21dB                           |
| Dimensional stability             |   | ISO 2551            | Shrinkage: 0.4%<br>Extension: N/A  |
| Fire classification               |  | EN ISO 13501-1      | Cfl-s1                             |
| Acoustical sound absorption       |  | EN ISO 354          | α <sub>w</sub> =0.05               |
| Weight                            |  | ISO 8543            | 2403.8g/m²                         |
| Thickness                         |  | ISO 1765            | 4mm                                |
| Roll dimension                    |  | EN 426              | Width: 200cm<br>Length: 15-25/roll |
| Resistance to Fungi               |                                                                                     | ASTM G 21-13        | 0 Grade                            |
| Anti slip property                |                                                                                     | DIN 51130:2014      | R10                                |
| Antistatic                        |                                                                                     | ISO 6356            | 1.4kV                              |

### Technical information-2:

Construction: woven vinyl floor tiles/shapes

|                                            |                                                                                       |                |                          |
|--------------------------------------------|---------------------------------------------------------------------------------------|----------------|--------------------------|
| Thickness                                  |    | EN ISO 1765    | 3.2mm                    |
| Tile dimension                             |    | EN 994         | 50cmx50cm                |
| Weight                                     |    | EN ISO 8543    | 3.5kg/m²<br>(+/-5%)      |
| Dimensional stability                      |    | EN 434         | 0.05%<br>(X+Y direction) |
| Curling                                    |    | EN 434         | 1.29mm                   |
| Fire classification                        |    | EN ISO 13501-1 | Bfl-s1                   |
| Castor chair resistance                    |    | EN 425         | No effect                |
| Residual indentation                       |   | EN 433         | 0.08mm                   |
| Thermal conductivity                       |  | EN 12667       | 0.0416W/m.k              |
| Thermal resistance                         |  | EN 12667       | 0.0639m                  |
| Acoustics                                  |  | EN ISO 140     | ΔLw=14dB                 |
| Assessment of static electrical prepensity |  | EN ISO 1815    | 2.1Kv                    |
| Formaldehyde release                       |  | EN 717-1       | E1                       |



Global Sources  Verified Supplier ★★★★★