


DRAGONSHINE

texlyweave®

A HANDBOOK OF WOVENVINYL PRODUCT

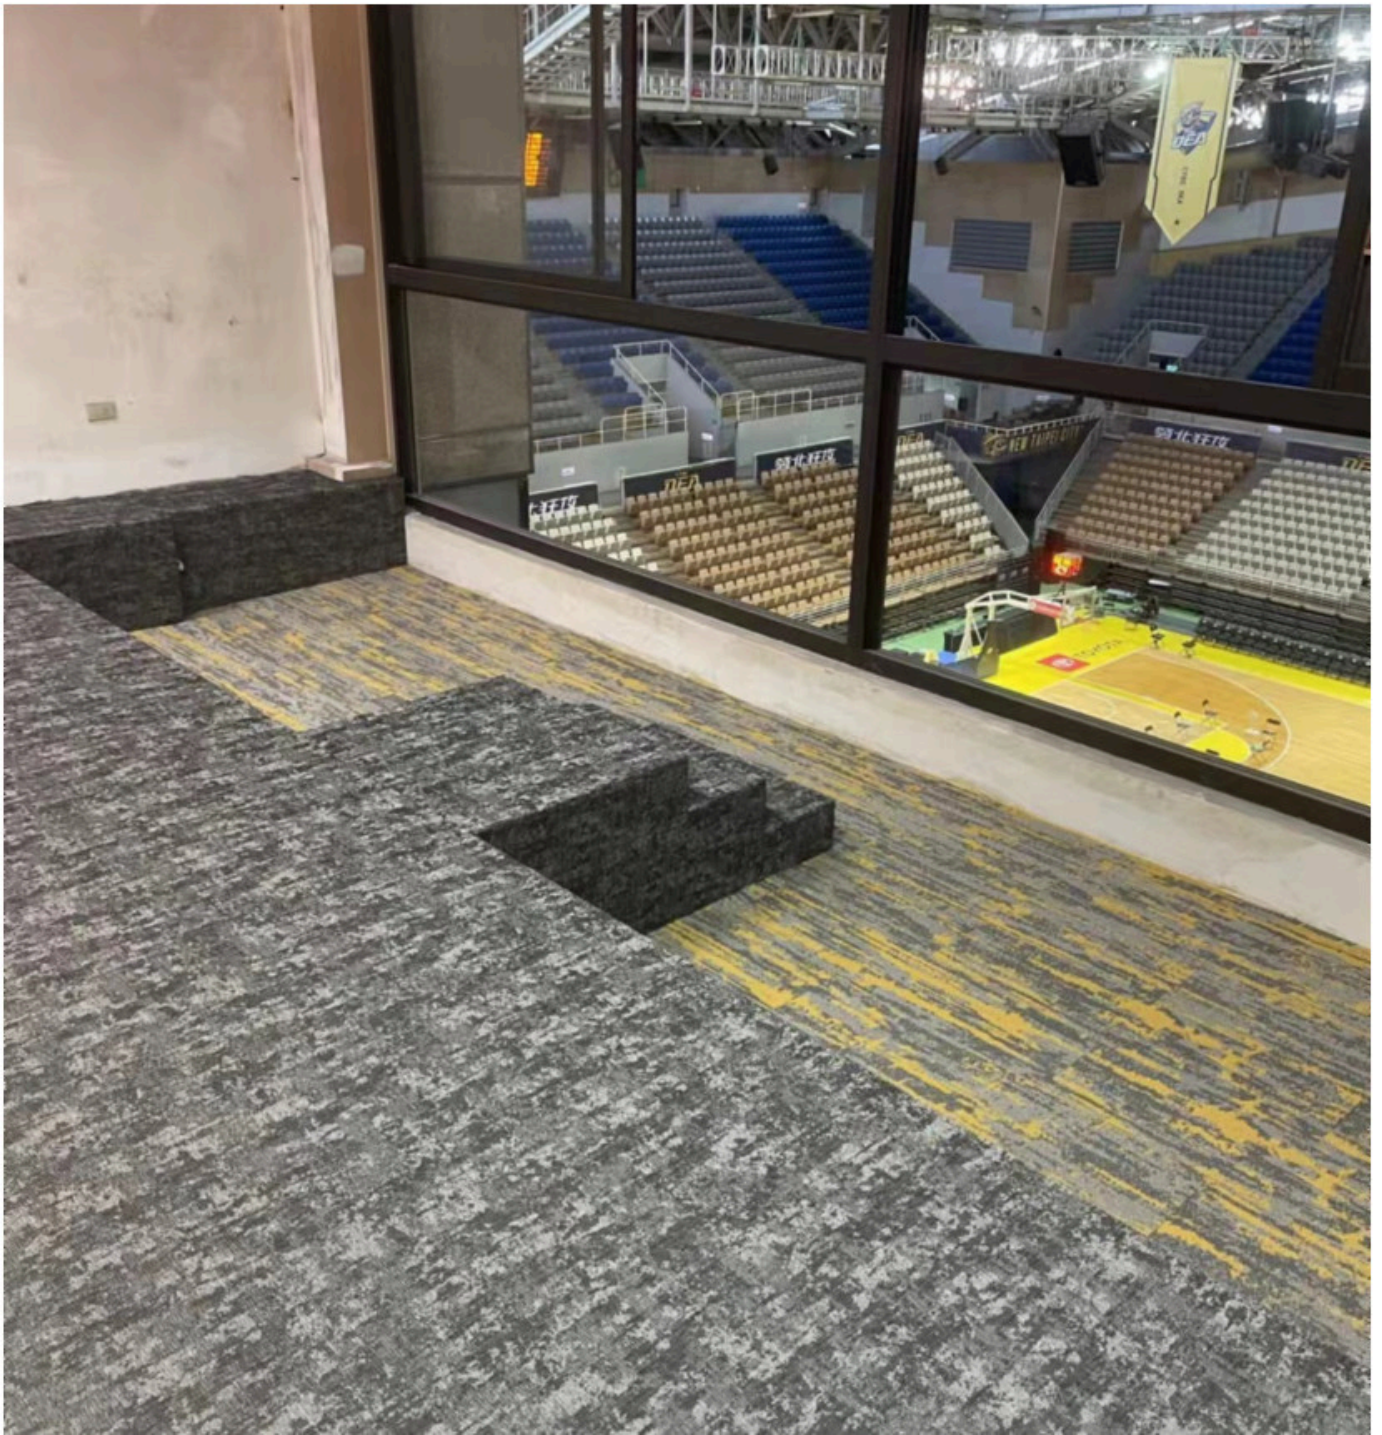

texlyweave®

we challenge the norms of weaving

©1999-2022 Dragonshine. All rights reserved.

Contents

A. 综述 Summary

关于仕晴公司，商标部分“texlyweave®”和“texlymat®”

About **DRAGONSHINE & STRINGWEAVE**, Brand "texlyweave®" and "texlymat®"

B. 产品介绍 You should know about texlyweave

C. 施工 Installation

1. 地毯 Flooring

- 1.1. 工具的准备 The preparation of tools
- 1.2. 地毯底层准备 Floor preparation
- 1.3 施工前准备 Before installation
- 1.4 施工方法 Installation
- 1.5 胶水施工 Adhesive application
- 1.6 焊接拼接缝 Welding of the seams

2. 壁布 Wallcovering

- 2.1 工具的准备 The preparation of tools
- 2.2 施工方法 Installation
- 2.3 电源开关及插座贴法 How to do when meet electric power switches and plugs
- 2.4 “texlyweave”壁布施工注意 Note
- 2.5 施工常见问题误认为是壁布的品质问题 Some explanation

3. 方块毯 Tile

- 3.1 工具的准备 The preparation of tools
- 3.2 地面准备 Floor preparation
- 3.3 施工方法 Installation

D. 清洁 Cleaning

1. 初次安装后的清洁 Cleaning after installation (Initial cleaning)
2. 日常清洁与维护 For daily maintenance(routine cleaning)

E. 使用、维护和保养 Use, maintenance and care

1. 初次使用 Initial use
2. 使用和维护的注意 Note for use and maintenance

F. 创意使用 Creative use

1. Customized area rugs with border
2. Flooring with your logo, symbols can be realized

G. “texlyweave”常见问题 FAQ for “texlyweave” flooring

表目录 Chart

图表 1 Chart 1: 产品性能表 Product property

图表 2 Chart 2: 符合EN15114标准的编织乙烯基地板规格 Woven vinyl flooring specs at standard EN15114

图表 3 Chart 3: 已经测试过的壁布指标 Specification for Wall Covering

图表 4 Chart 4: 地板施工工具 Floor installation tools

图表 5 Chart 5: 方块施工工具 Tile installation tools

图表 6 Chart 6: 污渍去除建议表 stain remove suggestion

A. 综述 Summary

We entered the flooring industry with "texlyweave®" and "texlymat®" In 2002. "texlymat®" is the flooring brand for China market, while "texlyweave®" is for the international.

We keep developing our products from every detail to make them as perfect as possible. This woven vinyl floor will cover your flooring needs for good! It is the best alternative to traditional carpets and wooden and marble floors because it offers much more.

It is

- ☆Strong, durable, soft, and comfortable.
- ☆Very good on elasticity from the best raw material we chose.
- ☆It has a clear criss-cross structure, just like cutting the fabric to make clothing to fit the body, but here to your space!
- ☆Easy to apply, clean, and maintain.
- ☆Sound absorbing.
- ☆Flame retardant and anti-slippery
- ☆ Long-lasting colors.
- ☆Unique feel and modern look.
- ☆Recyclable materials, environmentally friendly, and antibacterial.
- ☆All weather, ideal for indoors and outdoors.
- ☆Creative design realization
- ☆And last but not least, it is both affordable and money-saving as it is warm in winter and cool in summer.

Our flooring has been widely used on many occasions. We have had more than 600 projects in the past years. Customers covered offices for senior managers, a sales hall for a famous real estate brand, vehicles, furniture, and clothing—others such as catering, hotels, SPA, airports, resorts, and Gym.

Designers are happy to have a new choice to put his talent into new projects.

关于仕晴公司，商标“texlyweave®”和“texlymat®”

杭州仕晴纺织品公司拥有texlymat® 和 texlyweave®商标，texlymat® 的地板产品主要销往国内市场。另外一个品牌 texlyweave® 主要销往国际市场。

我们于2002年进入地毯行业，我们从每一个细节努力使其更加完美。

我们的地毯和地板产品可以让你的需求得以满足，它是不同于传统地毯，木地板和大理石地板，有着许多优点和不同之处。

☆牢固，耐用而且舒适。

☆选用最好的材料制作，它的弹性让踩上去可以想跳起来。

☆它有如此清晰的纵横交错的纺织品结构，这个场所如同衣物一样量体裁衣包装了起来。

☆容易使用，清洁和维护。

☆吸音，给你一个安静的环境。

☆防火并且防滑。

☆色牢度好，不易褪色。

☆可循环材料，环保并且不会防霉，抗菌。

☆耐候性好，可以适应室内室外使用。

☆可以用于家里与众不同的地板创意

☆最后最重要的是你负担得起这个价格，而且他冬暖夏凉，让你的空调系统节能又一次达到节省费用的目的。

我们的地板已经在很多场所被采用，客户遍布国内外。我们的国内外已经有数千个项目，涉及各个行业，各个场所。业主和设计师们很高兴有一种新的地板材料可以供他们发挥他们的才华，用于他们所设计的各个项目中。试试看，它有着不同于以往传统地毯的感觉和很不一样的视觉效果！

请看以下的产品性能表：

Characteristic 项目	Test method 测试方法	Requirements 要求	Results 测试结果	Conclusion 结论
Colour fastness to light	BS EN ISO 105-b02:1994	General ≥ 5 Pastel shade ≥ 4	> 6	Not easy to fade on sunlight 光照不易褪色
Rubbing (wet)	BS EN ISO 105-X12:2002	≥ 3	4/5	Not easy to fade after friction 摩擦后不易褪色
Rubbing (dry)		$\geq 3-4$	4/5	
Water (change in color)	BS EN ISO 105-E01:1996	Plain carpets $\geq 3-4$ Other carpets ≥ 4	5	Not easy to fade by water and not easy leave stain 水泡不易褪色，不易留水渍
Water (staining)		All carpets $\geq 2-3$	5	
Hairiness(pilling)	BS EN 1963 Test D	Assess against photo scale after 200 cycles	> 4.5 (no hairiness)	No hairiness, keep new and easy to clean 不起球，外观保持平整，容易清洁.
Colour change	Pr EN 15115 & Annex B	Due to spilt water ≥ 4	5	Spilt water and soil effect the colour better than standard 洒水和泥土导致地毯的颜色变化优于标准要求。
		Due to subsequent soiling ≥ 3	5	
Dimensional stability	ISO2551	Shrinkage $\leq 1.2\%$ in each direction	Max - 0.33	Vinyl flooring will shrink but not extend. 乙烯基地板会有所收缩但是不会膨胀。
		Extension $\leq 0.5\%$ in each direction	No extension	
Castor chair suitability A: continuous use, B: Occasional use	EN 985: 2001 Test A	A: $r \geq 2.4$ B: $r \geq 2.0$	4	Suitable for continuous use for castor 适于滚轮持续性使用（但是为了防止局部褪色显旧，还是建议适度保护滚轮下方地板以免影响外观）
Anti-static walking test	ISO 6356@25% r.h.	$\leq 2.0\text{kV}$	0.4kV	Good anti-static, 高于标准的抗静电

图表 Chart 1: 产品性能表 Product property

Classification		EN685	33	Heavy commercial applications 重度商业地板用途
Colour fastness to light		EN ISO EN105-B02	>6	Higher than standard (>5) 高于标准要求
Fire classification		EN ISO 13501	Cf1-s1	Meet the Cf1-s1 requirement of FR 达到欧盟 Cf1-s1 防火的标准要求
Body Voltage		ISO 6356	<2kv	抗静电 Anti-static
Castor chair suitability		EN 985	Continuous use	适于办公椅滚轮连续使用(但是为了防止此块区域提前褪色和磨损, 请加一块保护垫) Suitable for castor continuous use
Slip resistance		EN 14041 Technical class DS	>0.3	防滑性达标, Good anti slip
Dimensional stability		ISO 2551	<0.33	尺寸稳定, Stable size
Impact noise reduction		EN ISO 140-8	$\Delta L_w=22$	更好的吸音性能, 优于更加昂贵的进口硬底地板 Better than top brand flooring.
Resistance to stains		EN 423	Rating 0 No effect(highest grade)	不易沾污的最高级别, 优于更加昂贵的进口硬底地板。 Not easy to get stain.
thickness		EN 428	4.0mm	厚度值
Roll length		EN 426	20-30m	长度值
Roll width		EN 426	2m	宽度值
Roll weight		EN430	2kg $\pm$ 0.1kg	单位克重值


图表 Chart 2: woven vinyl flooring specs at standard EN15114 符合EN15114标准的编织乙烯基地地板规格

B 产品介绍 You should know about texlyweave

1 关于texlyweave 地板可以了解以下特点

Introduction of texlyweave® woven flooring cover:

The weave of texlyweave® will not run parallel to the cut edge. Therefore any wave, bow, or skew in the products is normal due to the way of weaving. The tolerance for bow and skew is max 3.8cm (1.5m width) or 5cm (2m width) in either direction. Some patterns will also exhibit light and dark shading in the material that is also normal. This shading is also evident at the seams, where two pieces of the same style may have a different shade.

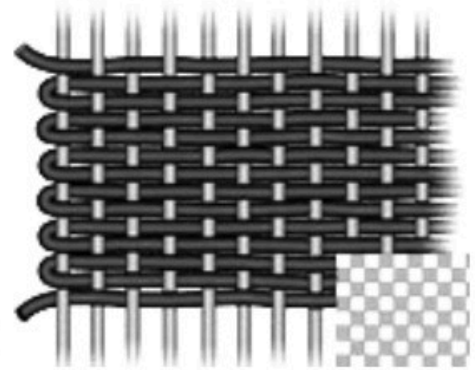

Regarding the vinyl fabric by two-tone yarn weaving, in a different section, it will have different colors and brightness according to views' different angles, positions, and light intensities; it will appear in a versatile, natural, and mottled style.

对“texlyweave®”编织地板表面织物的认识：

texlyweave® 的编织不会完全平行于边缘，因此任何波浪，弯曲和歪斜对于采用编织的产品来说是正常存在的。可以允许的歪斜和弯曲的最大值：1.5米的宽度时是3.8厘米，2米的宽度是5厘米，有一些款式会显示材料同时有亮和暗的阴影情况，这种阴影同时也可能在当两片完全相同的安装在一起时在拼缝处会出现，这也是正常的。

双色丝面料织造，该面料在不同的光线下，不同的区块在会显现出不同的颜色和亮度，根据观者视角不同，位置不同，灯光强度不同而不同。形成一种多变，自然的，斑驳的风格。

As we mentioned in our introduction above, we cannot avoid the color difference in every lot; sometimes, we cannot find them during production and deliver them to the customer, so please check the roll color carefully before installation. If you find this situation, please leave this roll at last; at the same time, contact our agent or us, and we will compensate for the shortage caused by the color difference.

如我们开始对我们地毯表面织物的介绍，有时候可能存在生产时难以发现的色差，这样的地毯我们发给了客户，一旦开卷，请仔细查看，是否有色差，碰到有色差的我们建议

把他们安排在最后来施工，由于色差在这个织物上是无法避免的。可以将色差及时报给供货商或者代理，我们会补足由于色差导致的面积不足。

You may find some white threads going out of the border; this is a regular occurrence. Cut the with scissors; it will not affect product quality and total appearance.
如果发现从边缘有白色的丝线飞出，这也属于正常情况，只要用剪刀剪去即可，不会影响整个产品的品质和外观。

2 关于texlyweave®墙布你可以了解

Introduction of texlyweave® woven wall covering:

“texlyweave®” wall covering is made of the same fabric as flooring plus a non-woven backing. Please kindly find below the specs for the wall covering.

对“texlyweave®”编织壁布的认识：

“texlyweave®”壁布采用和地板一样的布料背后衬上了无纺布底。

As a new wall covering material, it unified the textile-based division covering and plastic wall covering superiority; it has a comfortable textile vision and gentle touch, sound absorption, ventilation, hydrophilicity, and nobleness; at the same time, its material is stronger and more durable than fabric, overcome the fabric shortcoming quickly mildew, it looks finely woven and higher grade. With the color design, it can also realize metal gloss or sisal, bamboo effect; of course, it is a warmer feeling than a metal wall covering and has a longer lifetime than sisal or bamboo material. Moreover, with its anti-static function, we can add formula to make it higher fire retardant or anti-bacteria so that you can apply it in particular areas such as hospitals, labs, or engine rooms.

作为一个新型壁布，又具有胶面壁布耐用、耐磨、耐刮的长处，克服了布料不易清洁，牢度不够，潮湿情况下会发霉的缺点。又比胶面的壁布看上去做工更加精细，高档。通过不同颜色系列的设计还可以实现具有金属壁布的光泽，但是比金属触感温和，如天然材料麻，竹的感觉，但是更加耐久。本身具有抗静电功能，如果加入防火和抗菌等其他配方，还可以配合特殊场所的功能所需。

Width门幅: 2m

Thickness: 1-1.5mm 厚度

Weight: from 600g-1000g 克重

Roll length: max 100m. 每卷最长

woven vinyl wallcovering, product standard EN15102:2007+A1:2011

Characteristics	Test Methods	Test Results
Roll width	ISO 1183	2m
Roll length	ISO 1183	15-25m/roll
Thickness	ISO 1183	1mm
Weight	ISO 1183	650-850g/m ²
Skew and Bow	EN 427	<1%
Tensile Strength	ISO 527-1/2	14Mpa
UV Resistance	ISO 105-B02	1000 hours
	ISO 4892-3	1000 hours G4-5
Color Fastness to Rubbing	ISO 105-X12:2001	DRY-4, WET-3
Thermal Resistance	EN12667	0.0639m
Acoustics	EN 11654	Class D
Impact Strength of High Speed Machinery	ISO 6603-2	MAX:4.13J
		TOTAL:14.24J
Abrasion Resistance	ISO 12947-2:	>20000
Water Vapor Sorption	ASTM C1104	0.40%
Formaldehyde emission	EN 717-2	Pass(<120mg/kg)
Fungus test	ASTM G21-13	0 Grade
Release of Vinyl Chloride		Pass(<0.2mg/kg)
Release of dangerous substance(SVHC)		PASS
Flammability	GB8624 / EN13501-1	B2 (D-S2,D0)
Flexural Properties	EN178	17.02Mpa
		688Mpa
Contents of Asbestos	ISO 2226-1:2012	ND
Microbial Resistance	ASTM G21-15	0 Grade
REACH 84	EC NO 1907/2006	PASS
Resistance to Fungi	ASTM G 21-13	0 Grade
Release of Formaldehyde	EN 12149 TEST C	3.5mg/kg
Heavy metals and Specific elements	EN 12149 TEST A	PASS

图表 Chart 3 Specification for Wall Covering 已经测试过的壁布指标

C. 施工 Installation

1 地毯 Flooring

1.1 施工工具准备 The preparation of tools:

裁剪工具 Cutting tools	铲子 shovel、墨线 carpenter's ink market、卷尺 tape measure rule、收边刀 safety knife、美工刀 cutting knife 等
清洁工具 Cleaning tools	吸尘器 Vacuum、抹布 Mop cloth、鞋套 shoe cover、拖布 Mop、扫把 Broom 等
粘合材料 Glue	耐齐 PVC glue 胶（指定）、汉高 Henkel PVC glue（指定）、若有拼花须用德国冷焊胶（指定）Cold welding liquid 等

图表 4 Chart 4: 地板施工工具 Floor installation tools

1.2 地毯底层准备 SubFloor preparation

The floor needs to be clean, with no cracks and oil stain free, pressure resistant, durable dry. Appropriate preparation is essential for a good result. First, the surface is treated with a primer, followed by a leveling compound. This compound is ground and vacuum cleaning. Take heed, depending on the construction of the floor, of the allowed residual humidity and possible rising moisture. If necessary, apply a damp screen.

地毯底层要清洁，无裂缝，无油腻，耐压处理并干燥。恰当的准备工作是对良好的施工效果的必要保证。表面底漆处理，并做自流平后用吸尘器清理干净。要考虑到底层不同材质的含水量或残留的水份引起的潮气，如有必要，可以考虑铺防潮膜。

1.3 施工前准备 Before installation

Unfold the roll in a ventilation environment for at least 48 hours.

Regarding the Textile industrial standards of Products, specific color differences are allowed from batch to batch. Therefore, we strongly suggest that the trial-pave use different ways and collections of products to match the best effect.

展开卷状的地板，并平置于通风干燥通风处不少于48小时。

根据纺织品行业规定，纺织品各批次之间一定的色差是难免的也是允许的。为了最大程度的减少色差，我们强烈建议在安装前进行预安装，避免色差反差大的放在一起，以达到最好的使用效果。

1.4 施工 Installation

Floor Preparation: Roll the texlyweave® floor covering out, overlapping for about 5 cm and leave 24 hours to acclimatize. Always lay all the rolls in the same direction. Avoid crosscut seams and use transition profiles if this can not be prevented. The best installation temperature will be higher than 15 centigrade.

铺开地毯，做大约5cm的重叠搭接，搁置至少24小时以适应环境。通常按同一个方向铺开地毯。为避免长度方向的接缝，建议提前做施工图纸早做安排。施工时温度必须高于15°C。

The rolls must be the same batch when laying several rolls in the same room.


但一个房间需要一卷以上的地毯时，所用的卷必须是同一个批号的。

To obtain the best results, 48 hours of acclimatization is advised, and during installation, the temperature should not be lower than 15 degrees Celsius, and the relative humidity not higher than 80%.

为了获得最佳结果，建议适应环境的时间为48小时，并在安装过程中的温度应不低于15摄氏度，相对湿度不大于80%。

Unnoticeable seams: overlapping lengths and the surplus must be cut off. about 5cm

不引人注意的拼缝可以这样施工：两幅地板互相重叠一部分然后割除多余的部分，折叠部分在5cm左右。

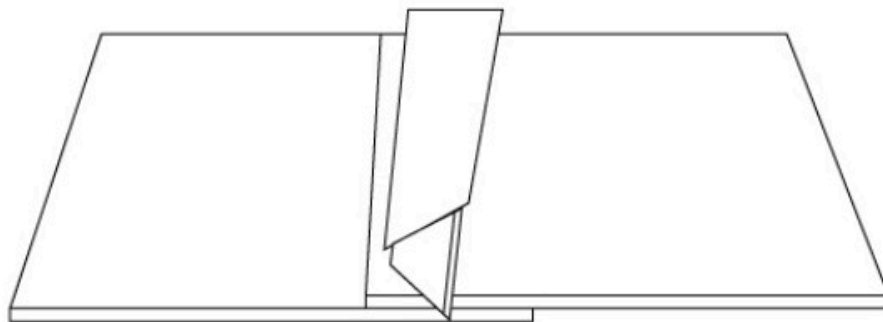

1.5 胶水施工 Adhesive application

The carpet will be bonded to the entire surface using the suggested glue. Certain glues cause plasticizer migration, often resulting in claims; our warranty does not cover these. Please look over the processing instructions of the manufacturer or contact your supplier. **Henkel's Thomist K188e / Uzin Ke 2000 s is recommended.**

texlyweave®地毯请用推荐的胶水贴合在地板上，某些胶水造成的增塑剂迁移问题经常引起的投诉不在我们的质量保证范围内，请遵照注意事项或者联系供货商来操作，可以选择进口的品牌汉高，优成或者国产的品牌，美圣雅恒等。



Fold the lanes back over half of their length (or width) and draw a line as a start for the glue application. Next, lay the floor in the wet glue and rub it with a cork beam from the center to the edges to remove all air bubbles. It is essential to close the seams very well. During the drying time of the glue, indoor conditions have to remain constant.

开始刮胶水前先掀起一半长度或宽度的地毯，然后把地毯铺在湿的胶水上，并用软木辊来回反复从中间往边缘滚擦，挤出气泡。两个边缘要尽量靠紧。在干燥过程中，室内的温湿度要保证稳定。

特别注意 **Note** Please try in a small area of the glue or cold welding liquid, then apply a more extensive area.

记住请先在小区域尝试以后再扩大。

1.6 焊接拼接缝 Welding of the seams

It is necessary to weld the seams; we suggest using cold welding glue; texlyweave® can supply this cold welding glue upon customer request. Masking tape is advised on the joint before cold welding.

Processing instructions for Werner Müller PVC-COLD-WELDING type A technique.



拼接缝焊接有必要，我们建议用冷焊胶 Werner Müller PVC-COLD-WELDING type A, “texlyweave”可以提供客户专用的冷焊液。建议施胶前贴美纹胶带于地毯接合处以保护胶水溢出溶损地毯表面。

特别注意 **Note** Please try in a small area of the glue or cold welding liquid, then apply a more extensive area.

记住请先在小区域尝试以后再扩大。

施工上的注意事项 **More suggestion**

A large cloth or thick paper is prepared for the floor just installed; to prevent the flooring from being destroyed by the worker and machine traffic.

Note A large cloth or thick paper prepared for the floor just installed; prevent the flooring from destroying by the traffic of workers and machines.

施工结束后请用适当材料铺在地毯上，以免施工人和车进出弄脏和磨损崭新铺设好的地毯。

专用的地板强力胶或者地板万能胶：用于地毯粘好后固定在基底地面上。

割刀：用于铺设时切割地毯的重叠和多余部分，美工刀和鱼形安全刀各一。

冷焊液：用于接缝的粘合，每支40g，可以用50米

2 壁布 Wall covering

Application 应用: Upholstered Walls, Walls 软装墙面, 墙面

Characteristics	Test Methods	Test Results
Roll width	ISO 1183	2m
Roll length	ISO 1183	15-25m/roll
Thickness	ISO 1183	1mm
Weight	ISO 1183	650-850g/m2
Skew and Bow	EN 427	<1%
Tensile Strength	ISO 527-1/2	14Mpa
UV Resistance	ISO 105-B02	1000 hours
	ISO 4892-3	1000 hours G4-5
Color Fastness to Rubbing	ISO 105-X12:2001	DRY-4, WET-3
Thermal Resistance	EN12667	0.0639m
Acoustics	EN 11654	Class D
Impact Strength of High Speed Machinery	ISO 6603-2	MAX:4.13J
		TOTAL:14.24J
Abrasion Resistance	ISO 12947-2:	>20000
Water Vapor Sorption	ASTM C1104	0.40%
Formaldehyde emission	EN 717-2	Pass(<120mg/kg)
Fungus test	ASTM G21-13	0 Grade
Release of Vinyl Chloride		Pass(<0.2mg/kg)
Release of dangerous substance(SVHC)		PASS
Flammability	GB8624 / EN13501-1	B2 (D-S2,D0)
Flexural Properties	EN178	17.02Mpa
		688Mpa
Contents of Asbestos	ISO 2226-1:2012	ND
Microbial Resistance	ASTM G21-15	0 Grade
REACH 84	EC NO 1907/2006	PASS
Resistance to Fungi	ASTM G 21-13	0 Grade
Release of Formaldehyde	EN 12149 TEST C	3.5mg/kg
Heavy metals and Specific elements	EN 12149 TEST A	PASS
Release of Vinyl Chloride Monomer	EN12149 TEST B	0.12mg/kg

图表 3 Chart 3: 已经测试过的壁布指标 Specification for Wall Covering

2.1 施工工具准备 The preparation of tools

2.1.1 PVC地面胶 Thomist K188e / Uzin Ke 2000 s are recommended for permanent adhesion/永久性粘贴

2.1.2 水性压敏胶 Water base PSA (Pressure sensitive adhesive) /可多次揭贴

2.2.3 其他必备 Other Necessaries

特别注意 NOTE Wovenvinyl wallcovering is heavy, and initial adhesion of PVA (Polyvinyl Alcohol) might not be enough to catch the textiles onto the wall. Therefore, another supplemental solution is advised.

texlyweave壁布是重磅的光滑表面乙烯基织物，聚乙烯醇环保胶的初黏性不足以固定织物到墙面，请谨慎配套以辅助手段。

PSA is a soliton for multiple peeling & hanging, and trimming is usually advised to prevent edge turn up.

压敏胶施工时请辅助以边缘压条以免外力使织物边缘翘起。

2.2 施工 Installation

2.2.1 Install each sheet on the wall using a stiff, short bristle brush or flexible, broad knife. Apply material in the sequence above doors, above and below windows as it comes from the roll - DO NOT SKIP. Vertical joints should not occur less than six inches from inside or outside corners. A heat gun (under 100m°C, not continuously for more than 10 seconds) may allow the vinyl to conform to irregular corners and melt the fly-out filament from the cutting edge.

用一个硬的短毛刷子或柔性宽刃刮刀安装每一幅织物。门框上，窗台下注意不要方向翻转。垂直接缝不要出现在转角的6英寸内位置。100摄氏度左右的热风枪可以不连续使用10秒来是织物适应转角，或则熔融边缘的飞丝。

2.2.2 Remove possible excess adhesive and dirt from wall covering surface, seams, and surrounding surfaces immediately using a sponge or damp cloth frequently rinsed in

clean, warm water. A paste-release chemical that breaks the static electricity generated may be added to the water. Dry with a soft, lint-free cloth. Please do not use excessive water to remove adhesive from seams, as it may seep into the seam and dilute the glue. As the dried bond is complicated and sometimes impossible to remove, immediate removal is imperative. Clean all seams to avoid paste staining.

海绵或湿软布尽快移除可能溢出在织物表面和接缝的胶水或异物， 可以使用添加适当溶剂和抗静电剂的温水来保持海绵和布清洁， 尽量使用不起毛，无线头的软布， 不要让太多水进入接缝。

2.3 电源开关及插座贴法 How to do when meeting electric power switches and plugs

2.3.1 关掉总电源后施工，以免触电。

Switch off the main power before installation.

2.3.2 将壁布盖过整个电源开关或 插座，从中心点割出两条对角线，就会出现4个小三角形再以美工刀沿电源开关 或插座四周将多余的壁布切除。

Cover the total power switch or the plug, cut two diagonal lines from the center of the position, then use the knife to cut the four small triangles from the border of the power switch or the plug.

2.4 “texlyweave”壁布施工注意

Because the non-woven backing can absorb water, the glue formula has to be thicker; white industrial glue can be added according to the experience to strengthen the adhesive power or to hang the textile after the appropriate glue has dried.

由于壁布背后的无纺布本身会吸水，故胶水配置要浓厚，使流动性降低，还应在胶水中加适量的白胶，以增加粘着力，直接在墙面上胶。或则等待胶水在适当的稠度再安装。

A stiff brush or nylon brush is not suggested for use. Instead, please use the soft brush from up to down.

不可使用硬质刮板或尼龙刷，应使用软毛刷由上往下轻刮。

Please keep your hand clean, and spread the glue carefully; once the glue comes out of the wall covering, please absorb it with a wet sponge.

保持双手清洁，小心上胶，不要污染壁布表面，若有胶水溢出应立即用湿海绵吸除。
To get out of the bubble, use a soft brush tenderly.

用毛刷轻轻赶出气泡，不可太用力，以免破坏壁布的面料。

Please use the suggested good quality glue; it will affect the whole appearance of the wall covering and its lifetime.

胶水的质量优劣将直接影响壁布的整体效果和使用年限，因此需购买正宗品牌的胶水或墙粉。

Please match the wall covering at the height of your eye from the middle of the wall if you are installing the wall covering with a clear and unmistakable design.

有图案的壁布，从墙中心与眼睛同高的位置开始对花，一般是从两幅裁边结合处来对准重复的图案。

Please don't throw away the fragment, for it can be used to patch the wall covering in the future.

零星壁布不要扔掉，以便日后修补使用。

Please open the door and windows after installation.

贴好壁布后，要打开门窗，保持室内通风。

When you hang pictures and other decorations on the wall, please cut a "v" at the point you will knock a nail.

当墙面需要悬挂油画或其他饰物，应在钉有钉子处的壁纸上划一个“V”字形，以便以后修补用。

2.5 施工常见问题误认为是壁布的品质问题 **Some explanation**

Install the wall covering before completely drying; this will be misunderstood as to the quality of the wall covering.

因采用湿贴的错误施工方法而导致壁布上墙后出现接缝明显、粘贴不牢等问题而误认为是壁布质量问题；

Too much glue comes out of the wall covering, but no action leads to a failure result.

胶水太多溢出壁布表面未能及时处理，造成与品质问题的混淆不清；

Installation people should have noticed the design and followed the plan.

该对花施工的图案没有对花施工；

The glue formula needs to be corrected or spread equally, leading to non-adhesive or side curls.

胶水调制比例不对或涂抹壁纸不均造成粘着性不好或容易翘边；

For an obvious design pattern, matching the design will cost more material. This requires buying more than simple pattern wall coverings.

注意须对花之壁布预留须酌量增加，针对此项须告知客户对订制长度部分勿算的太少；

The two-tone color difference cannot be avoided; this is not a quality problem.

编织的双色纱引起的色差无法完全避免，误认为是品质的问题.


3. 方块 Tiles

3.1 施工工具准备 The preparation of tools:

清洁工具 cleaning tools	吸尘器 Vacuum、抹布 Mop cloth、鞋套 shoe cover、拖布 Mop、扫把 Broom 等
粘合材料 glue	汉高 Henkel PSA glue、汉高 Henkel PVC glue（指定）、若有拼接须用德国冷焊胶（指定） Cold welding liquid 等

图表 5 Chart 5: 方块施工工具 Tile installation tools

AQUENCE
LA 3141 Water base
PSA

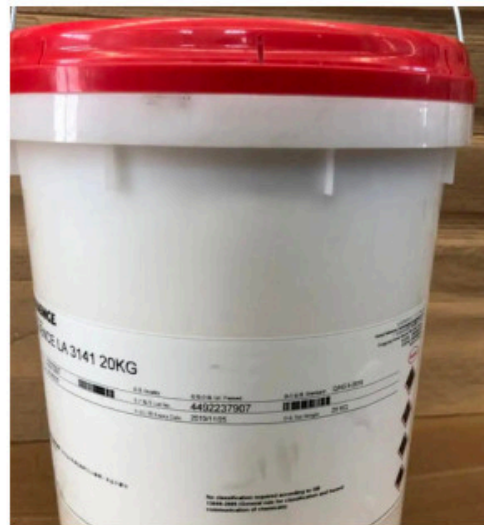

3.2 地面准备 SubFloor preparation

地毯底层要清洁，无裂缝，无油腻，耐压处理并干燥。恰当的准备工作是对良好的施工效果的必要保证。表面底漆处理，并做自流平后用吸尘器清理干净。要考虑到底层不同材质的含水量或残留的水份引起的潮气，如有必要，可以考虑铺防潮膜。

The floor needs to be clean, with no cracks and oil stain free, pressure resistant, durable dry. Appropriate preparation is essential for a good result. First, the surface is treated with a primer, followed by a leveling compound. This compound is ground and vacuum cleaning. Take heed, depending on the construction of the floor, of the allowed residual humidity and possible rising moisture. If necessary, apply a damp screen.

3.3 施工安装 Installation

测量并找到安装区域的正中间，查看余下区域的尺寸并画出第一条安装线以固定方块尺寸。重复以上步骤并画出第二条与第一条垂直的安装线。见图形(5)

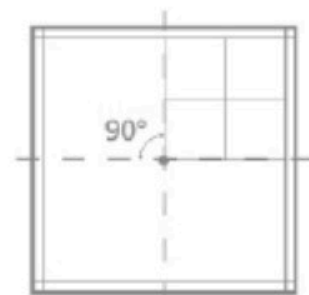


figure 5

Measuring the center of the installation space and checking the size of the selvage panel to draw the first install line to get the most significant and even size.

Repeat the same process to get the second line vertical to the first line and draw this second line. (See Figure 5)

从横截面开始安装，保证每片方块都互相垂直并紧贴在一起，否则会影响到整个安装。裁切方块会耗费很长时间，因此我们建议在上胶水之前先裁切好。以下是我们推荐的几种不同的安装方法（见图形 6）。

To install from this cross-section and make sure each panel is firmly closed and straight to each panel; otherwise, it will affect

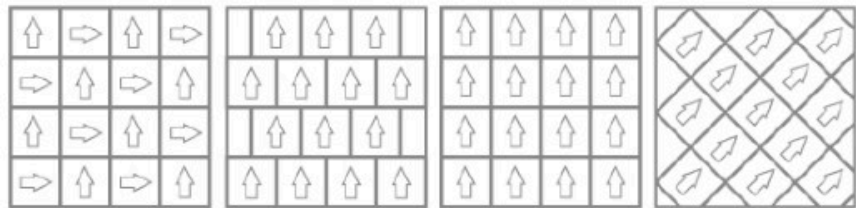


figure 6

the whole installation. Cutting the selvage panel will take a longer time; we suggested cutting it all before applying the glues.

We recommend the following several different installation ways (See as Figure 6)

安装完成后，至少用75KGS重的滚轮在所有的拼接处碾一遍。横向纵向分别一次。（见图形7）



D. 清洁部分 Cleaning

1 安装后第一次清洗 Initial cleaning

After laying: Construction dust (sand, gypsum) is very abrasive. It should be removed to avoid the danger of creating premature walking lanes. After vacuum cleaning, the whole surface is wet cleaned with an injection extraction machine. We recommended covering the entire area for the next job operation.

建筑废料（沙子，粉尘等）非常容易磨损地毯，必须及时清理以免早先铺好的走道过早被损坏。建议先用真空吸尘后再用抽洗机湿洗。我们建议进行下一步操作时盖住全部已铺设好的区域。

Our texlyweave series products are solid and durable; with correct maintenance (please find the sheet below), they will last long.

我们的texlyweave地板牢固，持久，如果用正确的维护保养方式的话，可以延长使用寿命。

Use a white and damp clean cloth to wipe the floor's surface. Use mild/soft detergent when needed.

用一块白色干净的湿布擦拭地毯面。如有必要，请使用温和/柔软的洗涤剂。

Vacuum clean the whole area to make sure of cleanliness.

为保证清洁度，尽量使用真空吸尘器对所有地毯面进行清理。

2 日常的维护 Routine maintenance

Just wring dry, mop the floor with clean and warm water and vacuum clean; for periodic cleaning, please get help from a professional cleaning company. Any stains, please remove them immediately. Otherwise, the stains will penetrate the floor/wall covering.

关于日常的维护，请用干净的温水后，拧干拖把后拖地板以及真空吸尘即可，阶段性的清洁和维护，请求助专业清洁公司或者人士。如果有任何斑点污渍，请以最快的速度清除干净，否则，这些污渍颜色会渗透到地板组织里去无法去除。



Occasionally you can use acetone, citrus, Pine-Sol, strongly alkaline cleaning agents, scouring powder, or strong solvents, but using more will damage the floor. Please try to use cleaning agent PH values around 7-8 often. Rinse and mop with at least one additional clean water rinse after applying detergent, as detergent residue will attract soil if not properly rinsed. Finally, use the Comb hair dryer.

偶尔可以使用丙酮，柑橘水，松溶胶等强力碱性清洁剂，擦洗粉或者强力溶剂，但是多用会损害地板。尽可能多使用的清洁剂PH值7-8之间。在使用清洁剂后，至少进行一次清水洗涤，因为残留的清洁剂将可能会吸引尘土沾染。最后使用梳毛干燥机清洁。



Below is the cleaning agent we suggest for different stains; please keep in mind to try in a small area before you apply the whole flooring.

以下表格是建议地毯表面沾污时用的清洁剂，请注意还是小范围实验后再扩大到大块面积。

Please remove the stain if it is liquid, our flooring will not absorb liquid, but if the liquid stays longer, it will penetrate the flooring with a color stain left on the material and not easily removed.

CLEANING & CARE GUIDENLINES

	Type of Stain 污渍种类	Procedure and Removal 清洗方法
1	Acid 酸性物质	Neutralize with ammonia 用氨水中和
2	Adhesive tape 粘胶带	Harden with ice, rub off with f ingers 先用冰块使其变硬，再用手指擦掉
3	Alcoholic Beverages 酒精饮料	Rinse with cold water, immediately followed by white vinegar, then rinse with cold water 先用冷水擦洗，随后立即用白醋擦洗，最后再用冷水清洗
4	Alkali 碱性物质	Neutralize with vinegar 用醋中和
5	Blood, catsup 血迹, 番茄酱	Rinse in cold water, then dilute ammonia, sponge with detergent and water, then rinse thoroughly 先用冷水擦洗，再将稀释过的氨水清洗，最后彻底清洗一遍
6	Butter 奶油, 黄油类	Rinse with hot water 用热水擦洗
7	Chewing Gum 口香糖	Apply ice, rinse with cold water, then sponge with 先用冰块使其变硬，再用冷水擦洗，最后用全氯乙烯（一种除斑剂）蘸海绵清洗
8	Chocolate 巧克力	Rinse with cold water, sponge with bleach 用冷水清洗，再用漂白剂溶合水蘸海绵擦洗
9	Coffee 咖啡	Rinse with cold water, sponge with detergent and water 用冷水清洗，再用清洁剂溶合水蘸海绵擦洗
10	Egg 蛋清, 蛋黄类	Rinse with cold water, sponge with detergent and water 用冷水清洗，再用清洁剂溶合水蘸海绵擦洗
11	Fruit, berry 水果, 浆果	If fresh, pour boiling water through the stain; if stubborn, bleach with hypochlorite or hydrogen peroxide. 如果是新鲜水果类，用沸腾的水倒入污迹处溶解，如果是干果类，用次氯酸盐或过氧化氢等漂白剂漂白污迹
12	Grass 青草迹	Sponge with alcohol, then detergent and water 海绵蘸酒精擦洗，再用清洁剂溶合水清洗
13	Ice Cream 冰淇淋	Sponge with Perchloroethylene (spot remover) 用全氯乙烯（一种除斑剂）蘸海绵清洗
14	Iodine 碘酒	Sponge with alcohol 海绵蘸酒精擦洗
15	Ink (Pen) 钢笔墨水迹	If fresh, sponge with detergent and water. If dried, sponge with bleach, oxalic acid (spot remover), and then scrub with detergent and water. 如果是刚刚滴落的，用清洁剂溶合水蘸海绵擦洗。如果是干的，先用海绵蘸漂白水擦洗，再用草酸（一种去污剂）擦洗，最后再用清洁剂溶合水擦洗
16	Ink (Ballpoint) 圆珠笔墨迹	Scrub with detergent and water, then rinse. For stubborn stains, use petroleum jelly, then sponge with Perchloroethylene (spot remover). Some inks dissolve in glycerin, followed by shampoo. 用清洁剂溶合水清洗，如果是干的，先用凡士林油，再用全氯乙烯（一种去污剂）蘸海绵清洗，有些墨迹可以在带有甘油的洗发剂中溶解

	Type of Stain 污渍种类	Procedure and Removal 清洗方法
17	Iron Rust 铁锈迹	Sponge with oxalic acid (spot remover), rinse well, or spread with salt, moisten with lemon juice, then place in the sun 用草酸剂（一种除斑剂）蘸海绵清洗能够很好地清洗掉，或者也可以在污迹上抹上一层盐，再用柠檬汁将其弄湿，然后放在阳光下晾干
18	Lipstick, wax, 口红印, 蜡	Sponge with alcohol or Perchloroethylene (spot remover) 用酒精或全氯乙烯（一种除斑剂）蘸海绵擦洗
19	Mildew 霉斑	Sponge with bleach, followed by water rinse 先用漂白剂蘸海绵清洗，再用清水擦洗
20	Milk or Cream 牛奶或奶油迹	Sponge with Perchloroethylene (spot remover) 用全氯乙烯（一种除斑剂）蘸海绵擦洗
21	Mustard 芥末, 芥菜迹	Apply warm glycerin, wash with sudsy water and Hydrosulfite bleach 先用热甘油擦拭，再用肥皂水和漂白剂轻擦洗
22	Oil 油迹	Scrub with detergent and water, and sponge with Perchloroethylene (spot remover) 用清洁剂溶合水清洗，再用全氯乙烯（一种去污剂）擦洗
23	Paint 油漆污迹	Scrub with detergent and water, then sponge with Perchloroethylene (spot remover) or turpentine. If not dried, latex and acrylic paints will wash away. 用清洁剂溶合水清洗，再用全氯乙烯（一种去污剂）擦洗，或者用松节油擦拭。如果不是干的，乳胶和丙烯原料可以被冲洗干净
24	Perspiration 汗渍	Sponge with peroxide and ammonia, and rinse with water. 用过氧化氢和氨水蘸海绵擦洗，再用清水冲洗
25	Sugar 糖渍	Sponge with hot water 用热水蘸海绵清洗
26	Tar 焦油污迹	Moisten with Perchloroethylene (spot remover), scrape off, then sponge residue with the same solvent 用全氯乙烯（一种去污剂）将污迹处弄湿，然后擦拭，最后用同样的溶剂再蘸海绵擦洗。
27	Tea 茶渍	Scrub with a borax solution and rinse, or keep the stain moist With lemon juice, then expose to the sun for a day or two 用硼砂擦拭，或者用柠檬汁让污渍保持潮湿，然后放在阳光下晒一到两天晾干。
28	Asphalt 沥青	A neutral cleaning agent or cleaner's naphtha, a scouring pad may be used 中性清洁剂或者是清洁挥发性溶剂汽油
29	Floor adhesive 地板胶水	Adhesive wash or methylated spirit, a scouring pad may be used; Dry carefully with a cotton cloth. 用甲基化酒精，用专业擦洗垫，用棉质布料擦干
30	Shoe heel marks 鞋跟印	A neutral cleaning agent or cleaner's naphtha, a scouring pad may be used 中性清洁剂或者是清洁挥发性溶剂汽油
31	Vomit, Excrement, Urine 呕吐物,排泄物	A neutral cleaning agent or cleaner's naphtha, a scouring pad may be used 中性清洁剂或者是清洁挥发性溶剂汽油

Chart 6 图表 6:污渍去除建议表, stain remove suggestion sheet

上面提及的各种污渍，一般说来清洁如下顺序：

先在角落不起眼的地方做实验，确保达到效果，同时没有损伤毯面。然后再在大面积的沾污毯面开始清洁。

如果是打翻了液体，我们的地毯不会吸水，但是时间长了会渗入地板留下色斑，难以清除，所以请及时处理。

D. 使用、维护和保养 Use, maintenance, and care

1 Initial use 初次使用

Please don't use the floor covering before the glue has hardened completely. During the drying time of the glue, indoor conditions have to remain constant. Therefore, it is necessary to protect the floor immediately after installation to prevent soiling and damage.

After 12 hours, start the initial cleaning

After 24 hours, begin simple traffic

After 48hours of charging the furniture

建议在胶水完全干透硬化以前不可使用，在干燥过程中，室内的温湿度要保证稳定。施工完毕后必须立即将地毯遮盖，以免被弄脏或碰坏。24小时之后可以少量人员进入，48小时以后可以搬入家具。

2 Note for use and maintenance 使用和维护的注意

The texlyweave® is a 5-7 year commercial wear warranty based on the careful and correct maintenance, but they are not warranted for use in outdoor locations exposed to full sunlight. The choice of color and pattern influences the maintenance requirements, as does the layout of entrances and staircases.

基于仔细和正确的维护，texlyweave®地板有5-7年的商用耐磨使用保证，但是我们不建议用于户外，暴晒在日光下。选择不同的颜色和款式有不同的保养得要求，同样，不同的入口和楼梯的布局也会影响。





Furniture must be fitted with pads of stainless steel, Teflon, or similar with no sharp edges. (All kinds of wall to wall carpeting require this), so it will not hurt the carpet if moving the furniture. Rubber materials (e.g., car tires) can affect the color of it in case of long-term contact. It is therefore advisable to provide exceptional protection in point of frequent contact with rubber materials. . If castor chairs are used, it is recommended to offer hard castors.

硬质材料的家具腿必须和地毯隔离保护（这是所有的地毯产品要求的），这样在家具搬动过程中不会对地毯造成损伤。橡胶材料（譬如轮胎）与texlyweave地毯长时间接触会沾色，因此建议接触橡胶部位要用特殊的保护。若是房间使用滚轮椅，建议使用硬滚轮。

The texlyweave® can be used for stairs, but it is better to use a slip stopper or mold to protect. If texlyweave® carpet is laid near entrances, it is essential to provide a water and dirt collection system.

texlyweave也可以应用在楼梯上；不过建议使用止滑条或者压条来保护楼梯凸缘。

假如 telxymat地毯铺设在入口通道上，建议先设立良好的水和脏物收集系统。



The material must be inspected before installation. Do not install flooring with visible defects! Any defects shall be reported to the place of purchase as soon as possible. If the material is deemed defective, We will replace it. Our liability is limited to the replacement of defective material only. The manufacturer is not responsible for the cost of removal or reinstallation.

铺设前必须检查材料。不要安装明显疵点的地毯。发现问题立即报告你购买的商家。如果品质确实有缺陷，我们会更换有缺陷的产品。请理解我们无法负责拆除或重新铺设的费用。



With rolls, depending on the area, your waste is between 5 and 10%. This is only a practical rule of thumb and serves as a guideline. Remember to order a small additional quantity to serve as backup stock for future replacements due to stains, dirt, and wear.

根据实际情况和边缘的预留，您的额外损耗在5%至10%之间。这个比例只是根据实际经验的统计，只是一个大体的范围。不要忘记多订一些额外的数量，作为备用库存，以便将来由于污渍，灰尘和磨损所需替代而使用。用一小块同一批次的备用地毯替换遭到破坏的地方。

A damaged small area can almost invisibly be repaired by cutting out the damaged area and replacing it with a spare qty.

小的破损的区域可以用多余的材料来替换,肉眼可以几乎无法发现。

We expressly waive any liability about the above-presented ideas, suggestions, guidelines, and recommendations for maintaining texlyweave® flooring, installation, and maintenance methods and practices may vary from country to country. Please always consult your local flooring contractor.

我们声明放弃任何有关以上对于安装和维护“texlyweave®”地板的点子，建议，指导和推荐方法的责任。这些方法因为不同国家而有区别，请多听取当地的地板施工承包商的建议。


F. 创意使用 Creative use:

Customized area rugs with bordere



texlyweave®

we challenge the norms of weaving

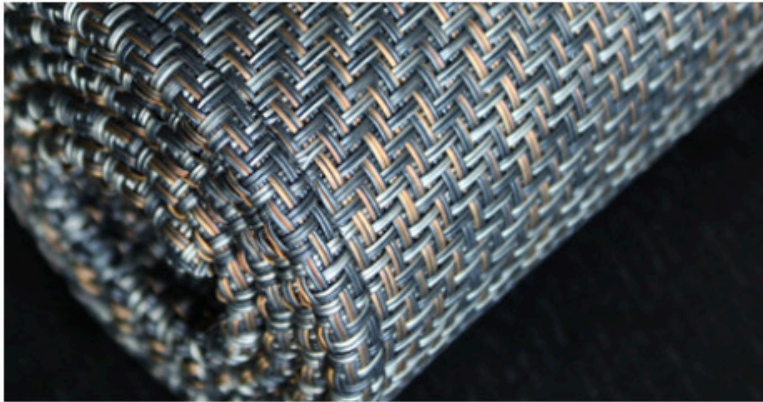

You can get your flooring material sewed with trim to make it as area rugs, doormats, runners or any sizes of mats in your area. We have trim fabric in 4 colors for you to choose.

Flooring with your logo, symbols can be realized.

Contact professional workers to do this.

Use at least 2 different designs to show your big logo, symbol or welcome words on the floor.

texlyweave®

we challenge the norms of weaving



G. “texlyweave®”常见问题

FAQ for “texlyweave®” flooring

What is the main content of texlyweave? Is texlyweave environment-friendly?
“texlyweave®” is produced by critically chosen material that can meet high-end customer’s requirements. We test essential items for the Environment friendly. If you have a particular need, please kindly let us know. We cannot assure test all the contents in our flooring, but we accept the suggestion from the customer.

主要成分是什么？texlyweave® 环保吗？主要的成分是乙烯基和高强工业用涤纶丝，我们的产品选用国内最好的原料进行生产，这就是为什么我们的产品比国内同类产品贵，但是比进口的产品便宜。所有原料按照国际标准配方生产，我们做的环保测试指标根据客户最关心的项目来测试，项目有限，如果客户有疑问，可以取同类国际产品一同做测试比较。

Is it easy to clean or maintain? Yes. It can be cleaned, vacuumed, or scrubbed with suitable equipment. Solvents are not recommended. If required, please get in touch with the manufacturer or local agent.

这个地板容易清洗保养吗？是的，可以擦洗，吸尘器吸尘或者拖把擦洗。可以不必使用清洁剂。如果一定要使用，请咨询厂商或代理商。

“texlyweave®” floor covering is warranted to maintain its texture and appearance for five years from the date of purchase. The warranty does not cover abnormal wear or appearance change due to abusive treatment, rolling traffic, unprotected chair castor traffic, repetitive mechanical traffic, chemical exposure, or foreign contamination. Additionally, this warranty does not address appearance change as a result of abrasion. This warranty is only intended to cover the wear properties of the material as manufactured.

这个地板有多少年可以用？“texlyweave®” 地板消费者可以有5年使用的保证。但是这个保证不含不正常的磨损或者由于暴露在粗放的环境中使用，滚动的通行量，未经保护下在办公滚轮下使用，持续的机械设备通过，暴露于化学试剂或者外来的污染物。这个保证不含由于磨损导致的颜色的变化。我们保证地板的耐磨性有5年。

“texlyweave®” is warranted to resist signs of permanent discoloration as a direct result of a manufacturing defect within three years of the date of purchase. It does not include gradual fading. Suppose the material does exhibit a fault according to the listed manufacturing test standards and minimum specifications. Our liability in all cases is limited (at our option) to repair or replace the non-performing material. Labor charges and other

这个地板会褪色吗？我们采用的材料达到产品需要的色牢度标准，我们保证购买三年内不会的由于生产商的制造缺陷导致永久褪色。但是这不含逐渐的褪色，如果材料根据测试报告或技术标准不显示成为一个缺陷，我们的责任将是有限的，我们有权利选择修补或者替换表现不良的材料。由此发生的人工费用和其他相应的费用不在我们的责任范围。这个保证是自购买之日起而且是不可转让的。

Is the flooring fire retardant? Yes, we have tested our flooring in different labs; you can read our test report from our agent or us.

这个地板防火吗？我们通过国内和国际的防火测试，有测试报告可以提供，可以达到火移开就会灭。

Is “texlyweave®” waterproof? No, it is water resistant, it will not absorb moisture, but water will penetrate the flooring to the subfloor if an extended period. To prevent this, please remove the water the first time.

这个地毯怕水吗？它不吸水，但是时间长了，水会慢慢渗入，所以还是要及时把表面的水吸掉以防渗入影响基底地面。

Is “texlyweave®” anti-static? Yes, we have tested this and proved it.

这个地板抗静电吗？是的，我们有测试报告可以提供。

Is the texlyweave woven vinyl floor mat anti-slip? YES, The woven structure of texlyweave® flooring naturally prevents slipping, making it particularly appropriate for public buildings where safety standards often determine the materials decorators can use. But our floor mat backing is NOT specifically treated for ant-slipping from water.

我们的地垫地板防滑吗？防滑，我们特殊的纹理表面可以起到防滑作用.但是我们的底没有经过特殊处理用于工作级防滑要求,因些不适合放在水多的地方，会打滑。

Can the texlyweave® floor mat be paved directly on the painted floor where the ambient temperature is high? No, the painted surface will react chemically with the vinyl backing of our floor mat.

不可以高温下放在有油漆的地面，会导致地面和地毯表面之前发生反应，导致损坏地板和地毯。

Can “texlyweave®” absorb noise? Yes, we have tested this and proved it. With its sponge structure backing, it is better than hard PVC backing flooring. If you need a quiet space, this is a better choice.

这个地板隔音吗？是的，这个地板有很好的降噪性能，和同类国外的乙烯基编织地板相比，隔音效果更佳。如果你需要一个更安静的环境，这种地板是一个更好的选择。

Is the texlyweave® two layer stick firm enough? Yes, we have many years of experience producing vinyl flooring; now, we keep our formula to keep our flooring at a stable quality.

这个地板会脱胶吗？我们经过多年的实践，目前我们的地板几乎不会脱胶，除非少量在地毯边缘由于机器边缘加固胶水未触及的缘故。

Can texlyweave outdoor use? We have put our outdoor flooring on for a year and found that if we took it back inside on rainy days, it would be suitable for other weather. However, to take it back is to prevent the sponge from absorbing water, becoming too heavy, and taking a long time to dry.

这个地板可以户外使用吗？我们经过多年实践，户外使用基本没有问题。但是在大风雨的天气请取回室内，以免被水泡过充满水变得很重，难以打理, 需要较长时间才能干。

Can texlyweave® install on the heating floor system? We have experience(but not tested in the lab), and our flooring can stand around 40°C, so if the heating floor system is at this temperature, it is no problem.

可以在地热上面铺这个地板吗？我们经过多年实践，地热温度一般在40摄氏度上下，我们的地板是可以承受这个温度的。

How many patterns can I choose? We are running 32 different styles of ways for you to choose from. It will take around two weeks to send them out of our warehouse if we have enough stock for you. If the quantity exceeds 300 sqm, we must add the amount from the production line. So please patiently wait around two months.

我有多少款式可以选？我们目前有32款现货供挑选，交货期一般可以在2周左右，如果订货量超过300平方，我们需要追加生产，要等候2个月左右。

Can I order the patterns from the catalog patterns? Yes, if you need a qty more than 800 sqm. We can weave the patterns, especially for you; kindly wait for around three months, including when we check the design and color, before bulk production.

我想定做自己喜欢的款式,但是样本上没有，可以吗？可以，但是需要数量多于800平方，等候3个月，需要时间配对颜色和款式。

Can I print on the flooring? From our experience, printing designs on vinyl flooring will have a similar effect as weaving the design.

我想在上面印刷可以吗？目前看来，印刷花纹的效果不如编织花纹效果好。

Can I have a logo on the flooring? Yes, you can have different patterns to block the floor. Please tell us your idea or your local agent before installation.

我想在上面做自己的logo可以吗？我们可以用不同款式的花纹切开来拼在一起来实现你需要的花纹或者logo, 请提前和我们沟通好。

Can I install the flooring myself with professional assistance? We can supply free help by phone or field service but need to charge the corresponding costs.

我想自己施工是否有协助？中国地区我们有师傅可以提供免费电话辅导或者现场有偿指导服务。其他地区请联系当地经销商。

Can you arrange installation? How much is the cost? Currently, we can supply installation service in China; please get in touch with the local agent for installation service.

你们可以安排施工吗？费用大概是多少？目前在中国可以，请联系我们或者当地经销商，我们会安排最近的施工人员和适当的时间来服务。

Can texlyweave® use at places with great people streams? YES. We have experience on the Australia pavilion at Shanghai World EXPO. Anyway, we did have to repair the floor during that time.

可以在人流多的地方使用吗？当然可以。

How long do I need to clean the floor? It is better that you have a routine cleaning every day and a thorough cleaning every week.

我多长时间打扫一次比较合适啊？最好是每天都要定时打扫，每周一次彻底的打扫，

What to do if texlyweave® broken? Can it be repaired? Yes, you can use the new material of the same pattern just on top of the damaged area and cut these two layers at the same time to get the fresh material the same shape as the broken area, take off the broken floor, use the correct knife and glue to replace the damaged area.

如果使用以后出现破损怎么办，可以帮助修补吗？可以修补。将同一款花型的材料放在破损的地板上方，切割的时候要一口气能把上面替代的材料和下面破损部分都切割，然后可以得到和下面替换部分形状和大小完全相同的材料，去除下面破损部分，用上面的同样形状可以完全无缝替换下面部分。请和我们或者当地经销商。



we challenge the norms of weaving

Informed by continuous contact with designers and professionals in the textiles and interiors industry, we create, manufacture and distribute solutions to enhance new surface comfort of the spaces in which people live and work. texlyweave® products are technically sophisticated, sensitive, and hard-wearing. Their hallmark is the textile in which they are from wall to floor: texlyweave® is woven in our workshop in China in a palette of hundred colors. Since 2002, it has been our pride and delight to play our part in developing quality furniture and interior in China, Asia, Europe, the US, and beyond.

our woven vinyl from wall to floor with an exclusive texlyweave® creation!

The above information is based on our experience and careful investigations. The variety of associated materials, constructions, and working conditions cannot be individually checked or influenced by us. So, your work's quality depends on your professional judgment and product usage. If in doubt, conduct a small test or obtain technical advice. Observe the installation recommendations of the related information and knowledge. The publication of this Product Data Sheet invalidates all previous product information.

We're right to make changes within the scope of technological advancement without prior notice.

此处的资料是根据我们实际掌握的知识和经验而提供的，因使用不通的材料以及工作条件的改变草果了我们的控制范围，我们郑重建议进入深入细致的实验并与我们的工作人员协商，对于以上资料，我们不接受任何相关责任。

我司有权根据情况对以上内容进行修改。

更多資訊，謹請垂詢！

***For more information, please contact us at
info@dragonshine.net!***

FLIPHTML5



@texlyweave

