


A photograph of a modern office interior. The floor is covered with grey and white patterned modular carpet tiles. On the left, there are grey office desks and white ergonomic chairs. On the right, there is a glass partition wall. The lighting is bright, coming from large windows in the background.

texlyweave®
by DRAGONSHINE

**THE Woven Vinyl
ACOUSTIC MODULAR CARPET – 2401**

Easy to apply, clean and maintain, strong, durable, soft and comfortable!

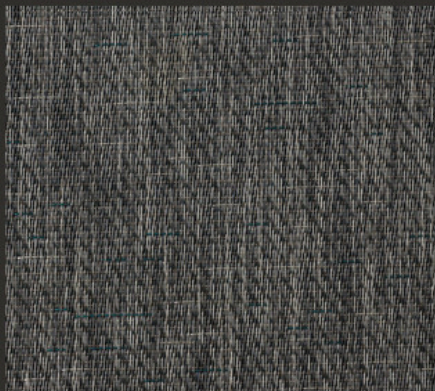


 1031 Slub Pewter




 13018 Slub Antique



 13019 Slub Nigrum

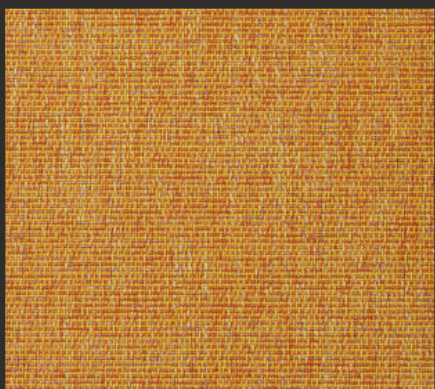


 17014 Random Calendula

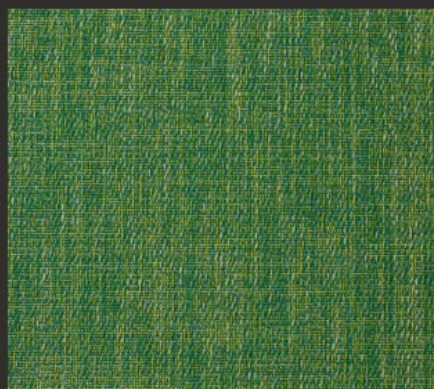


 17015 Random Agave




 17016 Random Mattiola

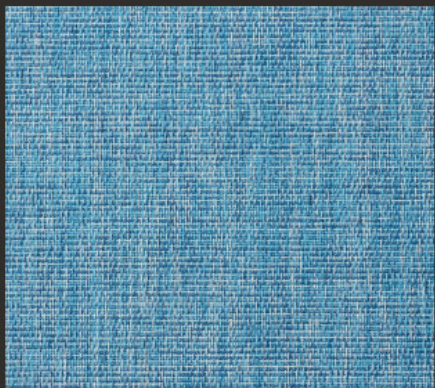

 17017 Random Myosotis

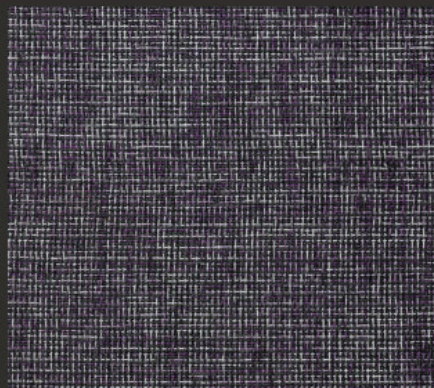


 17018 Random Iris

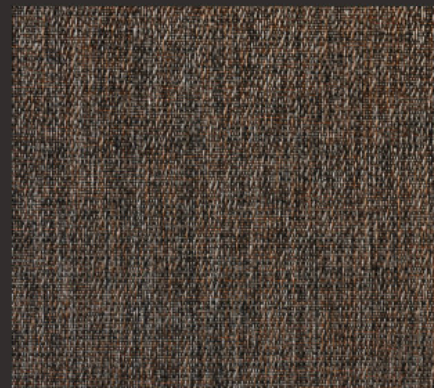


 17019 Random Vine




 17020 Random Stalactice

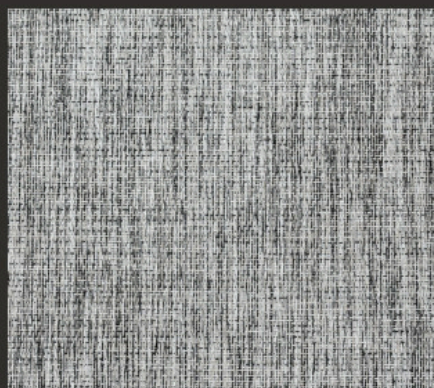


 17021 Random Cement

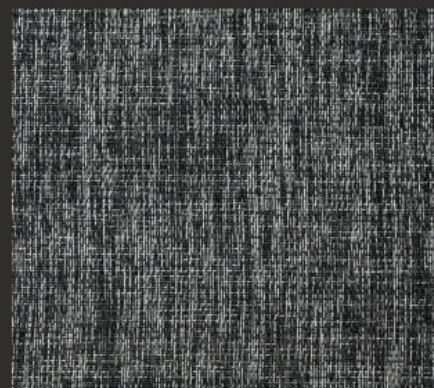

 17022 Random Black Brick

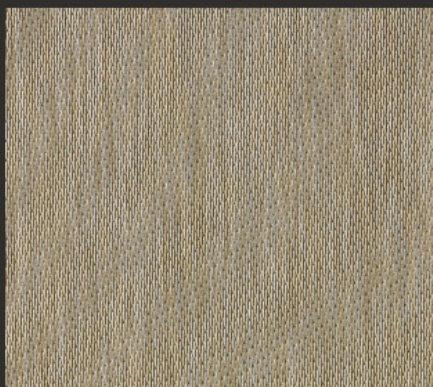

 1011 Tissu Curry

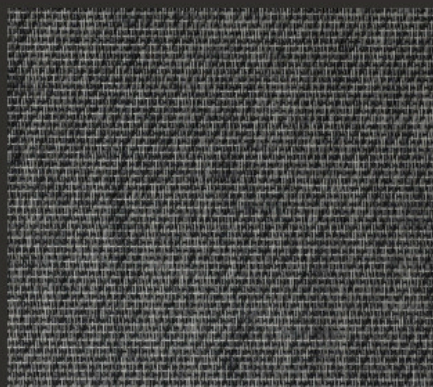


 1041 Tissu Anthracite



 1222 Tissu Cereal



 13020 Tissu Mono Maroon

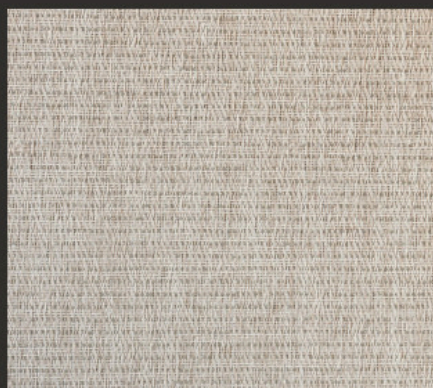

 14022 Mono Szyrt



 14023 Mono Carbon



 14050 Tissu Twill Limestone




 19025 Herringbone Oyster




 19027 Herringbone Blae




 19028 Herringbone Denim

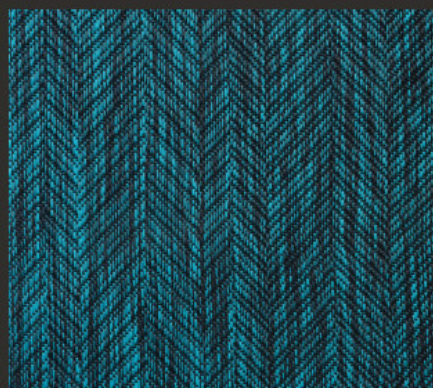


 19029 Herringbone Baltic

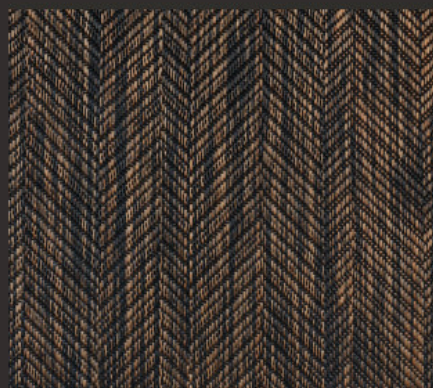


 19030 Herringbone Bran

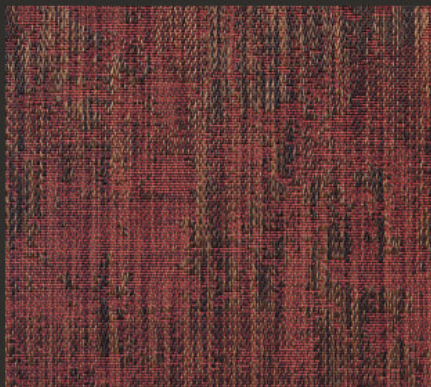


 18001 Moss Burgundy

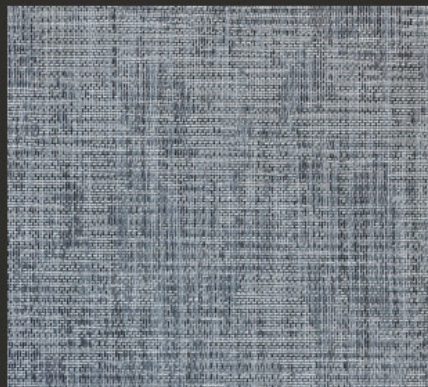


 18002 Moss Rail

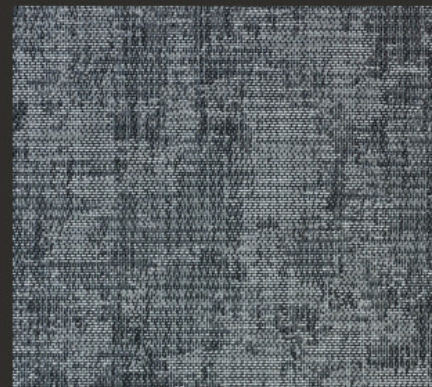


 18003 Moss Steely

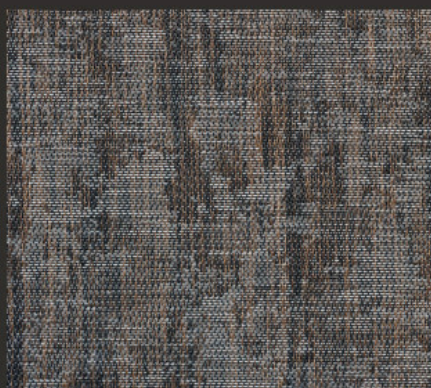


 18004 Moss Coco

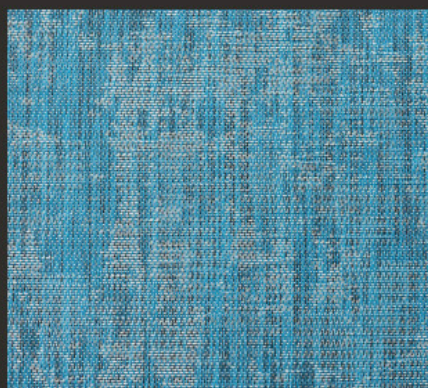


 18005 Moss Lago

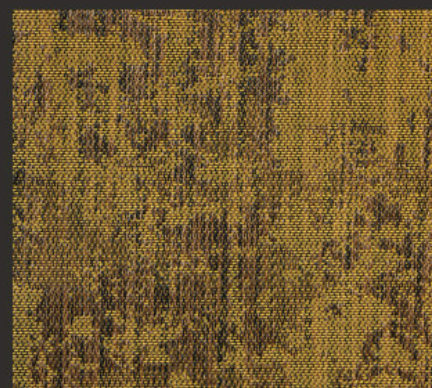


 18006 Moss Tabac

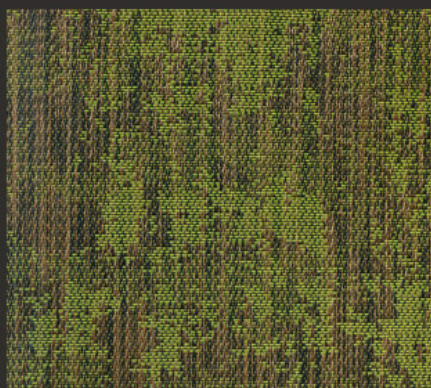

 18007 Moss Wasabi

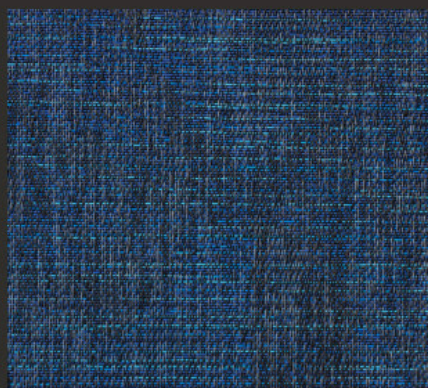


 19001 Patcher Denim

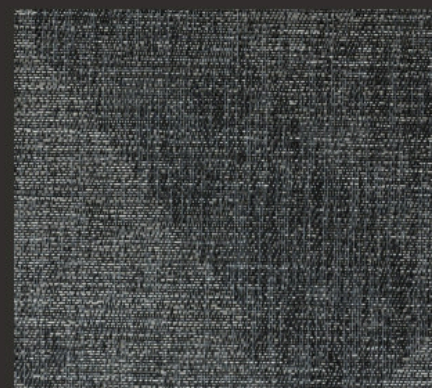


 19004 Patcher Quarry



 19012 Tweed Quarry

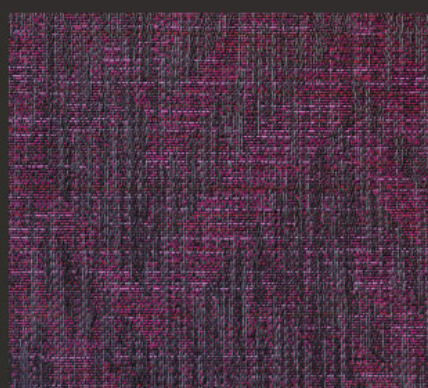

 19011 Tweed Peach

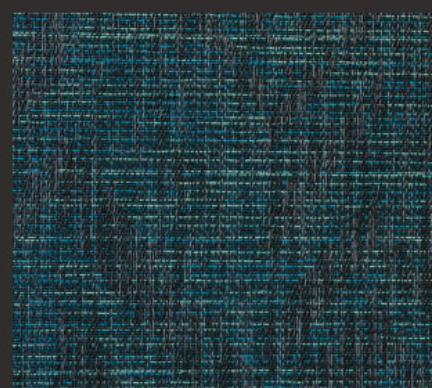

 19010 Tweed Jasper

Fire classification		BS EN ISO 13501-1: Part 1	Bfl-s1, d0
Reaction to fire tests		BS EN ISO 11925-2: 2002	PASS
Reaction to fire tests for floorings		BS EN ISO 9239-1: 2002	PASS
Classification for burning behavior of building materials and products		GB8624 - 2012	B1 (C - s1) Transparent color B1 (B - s1) Opacity c
Thermal conductivity Thermal resistance		ISO 8301:1991/aMD1: 2010	0.072W/m·K 0.046(m ² ·K)/W
Light ageing test - UV exposure		ISO 4892 - 3: 2016 Cycle 1	Lamp type: UVA - 340, 1000h: Grade 4-5
Color fastness to light		BS EN ISO 105 - B02: 2014	> 6
Color fastness to wet and dry rubbing		BS EN ISO 105 X 12: 2016	Wet 4/5; Dry 5
Tests for colour fastness		BS EN ISO 105 - E01: 2013	Change in colour: 4/5; Staining: 4/5
Sound Insulation		BS EN ISO 140-8: 1998	ΔLw=22dB
Sound absorption		BS EN ISO 354: 2003	αw=0.05, Not classified
Impact sound insulation		BS EN ISO 10140 - 3: 2010	ΔLw=21dB
Content of pentachlorophenol(PCP)		CEN/TS 14494	Not detected
Formaldehyde emission		EN 717 - 2	E1: 0.122mg/m ³ ·h
DEHP, DBP, BBP, DIBP		REACH Annex XVII, Entry 51&52, EU) 2018/2005	PASS
Reach		REACH REGULATION 211	PASS
RoHs		RoHs Directive 2015 863	PASS
AZO		ISO 14362-1: 2017	PASS
Materials and articles in contact with foodstuffs		EN 1186: Part3	PASS
Proposition 65		US California Proposition 65- Lead/Cadmium/Phthalate	ND

Surface 面層: 1.0 mm Woven Vinyl / 乙烯基編織布

Backing 底層: 2.2-2.5mm 發泡PVC 和无紡毡/ PVC Cushion & Felt

Composition 成份: PVC / Chalk / PET / DOP / Glass Fiber

Weight 克重: 4400 - 4500 gsm

Woven vinyl floor covering, product standard EN1307: 2014 + A3: 2018

Classification		EN 1307: 2014 + A3: 2018 / ISO 10974	Class 23/33 Domestic heavy/commercial heavy
Tile size			500x500, 1000x1000, customer size & customer shape
Weight		ISO 8543	Average =4400-4500gsm
Thickness		ISO 1765	3.20-3.50mm
Dimension stability		EN 986: 2005	Stage 1: 0.01% & -0.03% Stage 2: -0.02% & -0.04% Stage 3: -0.03% & -0.06% Stage 4: -0.02% & -0.03%
Skew & bow		EN 427	<1%
Slip resistance Anti slip property		BS EN 13893: 2002 DIN 51130: 2014	0.50, Class DS R10
Stain resistance		BS EN 423: 2002	Rating 0, Not effected
Fungus test		ASTM G21 - 13	0 Grade
Electrical propensity		ISO 10965: 2011	Horizontal resistance: 6.8×10^{10} Vertical resistance: 1.6×10^9
Antistatic		ISO 6356	0.4kv
Pilling by Lisson machine		BS EN 1963 Test A&D	4.5
Surface change by hexapod		BS ISO 10361: 2015	after 12000 cycles 5
Determination of the effect of a castor chair		EN 425: 2002	Continuous use
Water tightness		EN 15115 & Annex B	due to split water: 5 due to subsequent soiling: 5

Note 注意: This product is a simulation of natural materials, variations in Texture and Colour are inherent characteristics.
该产品模拟天然材质的纹理和颜色，其呈现的差异是产品之内在特性。



texlyweave®
texlymat®

THE TEXLYWEAVE WALL TO WALL FLOORING